wald trill 31.01.2015

Plumbing program 2024



Water pump pliers

The BRINKO pipe wrench "BRIpowerXL" with slip joint for larger pipe diameters and large-edged screw connections fits in every tool case despite its large diameter.

The maximum lever arm greatly facilitates work thanks to the optimum force transmission. The setting is made using an INOX pushbutton directly on the workpiece, and is extremely easy compared to a pipe wrench. The "BRIpowerXL" has a hand-friendly handle setting with finger clamp protection.

- · Chrome-Vanadium-Steel, chrome-plated
- Grip surfaces are hardened inductively
- · INOX pushbutton and spring
- · Self-clamping to tubes and nuts
- · With finger clamp protection
- · Anti-slip handles, soft dip-insulated, yellow
- · With pushbutton single-and adjustment
- · 27-level fine adjustment

Art. no. 687/150

Ø 1 1/4 Inch

EUR net $21,\frac{50}{}$ Art. no. 687/180

Ø 1 ½ Inch

EUR net $22,\frac{50}{}$

Art. no. 687/250

Ø 2 Inch

23,50

Art. no. 687/300

Ø 2 ¾ Inch

34.⁰⁰



Art. no.	I I	‡○ mm	‡Omm	‡0"
687/150	150	30	32	1 1/4
687/180	180	36	40	1 1/2
687/250	250	46	50	2
687/300	300	60	70	2 3/4









Water pump pliers "BRIpowerXL"

The BRINKO pipe wrench "BRIpowerXL" with slip joint for larger pipe diameters and large-edged screw connections fits in every tool case despite its large diameter.

The maximum lever arm greatly facilitates work thanks to the optimum force transmission. The setting is made using an INOX pushbutton directly on the workpiece, and is extremely easy compared to a pipe wrench. The "BRIpowerXL" has a hand-friendly handle setting with finger clamp protection.

Art. no. 687/400

Ø 3 ½ Inch

60,50



- · Chrome-Vanadium-Steel, chrome-plated
- Grip surfaces are hardened inductively
- INOX pushbutton and spring
- · Self-clamping to tubes and nuts
- · With finger clamp protection
- · Anti-slip handles, soft dip-insulated, yellow
- · With pushbutton single-and adjustment
- · 27-level fine adjustment

Dimensions:

Total length: --- mm

Pipe diameter: 10 3 ½ inch Pipe diameter: 10 104 mm

Width across flats for octagonal bolts: ‡○ 100 mm Width across flats for hexagonal nuts: ‡○ 95 mm

Weight: 1350 g



Corner pipe pliers

- · Chrome vanadium steel, forged
- · special hardened teeth
- · S-opening, polished
- · finger pinch protection

Art. no.	-	‡○mm	‡O "
619/1	320	0 - 49	1
619/11/2	440	0 - 68	1 1/2
619/2	560	0 - 85	2

Art. no. 619/1

Ø 1 Inch

EUR net **29**,00 Art. no. 619/11/2

Ø 1 ½ Inch

EUR net **41**,00

Art. no. 619/2

Ø 2 Inch

EUR net 65,<u>00</u>



haupa.com







Water pump pliers | automatic

- · Chrome vanadium steel
- · nose brightly polished
- · soft dip insulated anti-slip handles, yellow
- automatic jaw width adjustment bysimply sliping handles together, without snap adjustment
- · with finger pinch protection
- · patented technology



Art. no.	I I	‡⊘ mm	‡ 🔾 mm	‡0"
682/250	250	42	46	1 1/2

Art. no. 682/250

Ø 1 1/2 Inch

25.50

Art. no. 689/180

Ø 1 7/16 Inch

35,00

Art. no. 689/180

Ø 1 7/16 Inch

38,00

Fittings pliers | Key pliers

· Chrome vanadium steel, matt chrome-plated

- automatic jaw width adjustment, with push-button single hand adjustor
- with finger pinch protection, a parallel gripping and a moving jaw
- · smooth, polished gripping surfaces
- · soft dip insulated anti-slip handles, yellow
- · weight-reduced



- · 10 times hand force
- · replaces open-end wrench set

 ← → 	‡⊜ mm	‡O "
180	36	1 7/16
240	50	2
300	68	2 1/2
	240	180 36 240 50



Art. no. 689/240

37,00

Ø 2 Inch

Ratchet wrenches 4 in 1

4 in 1

The ratchet wrench handles 4 different nut sizes

- Sizes: 10 x 13 mm and 17 x 19 mm
- finely toothed 72 teeth of the 2 ratchets ratchets can be switched to clockwise/counterclockwise operation
- · due to 12-slided toothing, the wrench easily grips 4, 6 and 12-sided screws as well as almost round nuts
- · Chrome-vanadium steel, chrome-plated
- · extremely robust

Art. no. 83 Length 200 mm

> EUR net 29,⁰⁰



Hanger bolt driver



Multidirectional hanger bolt driver

- · Screw-in and screw-out tool hanger bolt driver Ø 8 mm and Ø 10 mm
- · self-clamping when turned
- · for fast and effortless screwing and unscrewing of stay bolts, express and hanger bolts without damaging the thread
- · with hexagonal driver for power tools

Art. no. 102/8

Ø8 mm

 $18,\frac{50}{}$

Art. no. 102/10

Ø 10 mm















Art. no. 674

1/2"

1/2"

Length 105 mm

EUR net 37,00

· supplied in DIY pouch



Combination angle valve key

The right tool, especially in tight spaces.

For damage-free installation of combination angle valves, which, in addition to connecting a mixer tap, also have an outlet for items like a dishwasher or washing machine.

Common 1/2" ratchets or socket wrenches are used for driving.

Art. no. 659-1

1/2" Ratchet

EUR net **27**,00

NEW





Sleeve extractor set

For the extraction of threaded pipe connections, sleeves and nipples

- · Left-hand extractor
- · CrV-steel, hardened
- · Surface burnished
- · Polished cutting surface

The service life of the extractors varies depending on the hardness of the counter material, save high-quality products!

Knock the extractor into the drill hole and loosen the screw.

Content:

- 1 sleeve extractor 3/8"
- 1 sleeve extractor 1/2" 3/4"
- 1 hexagonal insert 1/2", size 26
- 1 hexagonal insert 1/2", size 19
- 1 reversible ratchet, inner and outer square drive bit, 1/2" drive

Art. no. 1088

5 pieces















Handwheel socket "BRIwheelNut"

1/2"

A special tool with bars that engage in the opening of almost all handwheels and that can be driven with a ½" ratchet!

Now even the most stubborn barriers are solved with ease!

A problem that every craftsman in the plumbing and heating industry knows!

In the field of domestic water or heating supply, a component must be replaced. In order to facilitate this, shut-off devices such as valves or slide valves were installed in front of replaceable components during construction.

Now such a component as a water meter or a pump has to be replaced.

The valves or gates in front of and behind these components have not been moved for a long time and are therefore so tight that the force of the hand is not sufficient to move the valve or gate, let alone shut off the pipe tightly.

In order to achieve this, pliers, levers and obscure constructions are used. In most cases, this approach leads to the breakage of the cast iron handwheel, to bending or even to the tearing off of the spindle, since the rotational force is applied laterally.

The company BRINKO has addressed this nuisance and developed the handwheel socket "BRIwheelNut".

The special tool, which is protected with a design pattern, consists of a basic body with protruding webs that engage in the openings of almost all handwheels and that can be driven with a ½" ratchet. Due to the force applied centrally from above and the distribution of the pressure points over several surfaces, a non-destructive actuation of valves and slides is made possible.

The time saved and the avoided hassle of removing a destroyed valve with complete shut-off of the water supply or running a heating system empty with subsequent venting of all radiators makes the "BRIwheelNut" an indispensable and cost-saving helper.

Art. no. 129-50

1/2" Ratchet

36,00

NEW







Socket wrench set "BRImultiLock" 87 pieces

1/2" 1/4"

Art. no. 127-1

87 pieces

EUR net **114.**⁰⁰

Troubleshooter!

BRINKO "BRImultiLock"

Hex-Bolts

for damaged, contorted

Troubleshooter!

BRINKO "BRImultiLock" for damaged, contorted Hex-Bolts

- · Reversible ratchet with inner and outer hexagon
- twelve-tooth profile, 1/2" and 1/4" drive

Material: Cr-V 50BV30 steel | Industrial quality | Standards: DIN 3124: ISO 2725 | Finishing: Silver mat finished | Profile: BRImultiLock - Best solution for varity bolts | Torsion: 30-50% (depends on size) higher than DIN | Life-Time: 200k circle times at 35% of DIN | square drive

Content:

- Plumber Ratchets 1/4", 1/2"
- Universal joint 1/4", 1/2"
- · Spinner Handle incl. adapter 1/4", 150 mm
- Sliding T Bar 1/4", 150 mm
- Extension Bar 1/4", 50 100 mm
- Extension Bar 1/2", 125 250 mm
- Plug Sockets 1/2", 16 21 mm
- Bit Adapter 1/2" 5/16"

 BRImultiLock Socket 1/2" SW 10 - 12 - 13 - 15 - 16 -17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm

- Deep Socket 1/2" SW 14 15 17 19 mm
- BRImultiLock Socket 1/4" SW 4 4.5 5 5.5 6 -7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
- Deep Socket 1/4" SW 6 7 8 9 10 11 12 -13 mm
- Bits, slot 1/4" 4 5.5 6.5 mm
- Bits, cross slot 1/4" PH 1, 2 | PZ 1, 2
- Bits, allen key 1/4" 3 4 5 6 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 30
- Bits, cross slot 1/4" PH 1, 2 | PZ 1, 2
- Bits, allen key 1/4" 3 4 5 6 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 30
- Bit Adapter 1/4 5/16"
- Bits, slot 5/16" 8 10 12 mm
- Bits, cross slot 5/16" PH 3, 4 | PZ 3, 4
- Bits, allen key 5/16" 8 10 12 14 mm
- Bits, Tx 5/16" Tx 40 45 50 55















Socket wrench set "BRImultiLock" | 55 pieces

1/4"

Art. no. 122

55 pieces

EUR net 60,50

Troubleshooter!

BRINKO "BRImultiLock" for damaged, contorted Hex-Bolts

- · Reversible ratchet with inner and outer hexagon
- twelve-tooth profile, 1/4" drive

Material: Cr-V 50BV30 steel | Industrial quality | Standards: DIN 3124; ISO 2725 | Finishing: Silver mat finished | Profile: BRImultiLock - Best solution for varity bolts | Torsion: 30-50% (depends on size) higher than DIN | Life-Time: 200k circle times at 35% of DIN | square drive

Content:

- Plumber Ratchets 1/4"
- Universal joint 1/4"
- · Sliding T Bar 1/4"
- Spinner Handle incl. adapter 1/4", 150 mm
- Hex keys 1,5 2,0 2,5
- Extension Bar 1/4", 50 100 mm
- BRImultiLock Socket 1/4" SW 4 4.5 5 5.5 6 7 8 9 10 11 12 13 14 mm
- Deep Socket 1/4" SW 6 7 8 9 10 11 12 -13 mm
- Socket Tx-E 1/4" E 4 5 6 7 8
- Bits, cross slot 1/4" PH 1, 2, 3 | PZ 1, 2, 3
- Bits, slot 1/4" 4 5.5 7 mm
- Bits, allen key 1/4" 3 4 5 6 7 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 27 30 40



1111111111







Screwdriver set



- · 6 pieces:
 - 4 slot-head screwdrivers 80 x 3, 100 x 4, 125 x 5.5, 150 x 6.5 mm 2 Pozidriv screwdrivers PZ 1, PZ 2
- · chrome vanadium steel
- · matt chrome-plated blades
- · 2-component handle with a hole







ROLL REPRESSIVE

Art. no. 2122

Slot-head / Pozidriv

EUR net 25,00





Screwdriver set 1000 V



- 7 pieces, 1000 V:
 - 4 slot-head screwdrivers 1000 V 75 x 2.5, 100 x 4, 125 x 5.5, 150 x 6.5 mm 2 cross-head screwdrivers 1000 V PZ 1, PZ 2
 - 1 safety voltage tester 150 250 Volt (GS-certified)
- · chrome vanadium steel
- matt chrome-plated blades with protective insulation
- · 2-component hand with a hole
- · individually tested to IEC 60900

★ 1000 V IEC 60900







ROLL REPRESSIVE

Art. no. 2126/7

Slot-head / Pozidriv











Screwdriver set with striking cap



- Art. no. 2128
- Slot-head / Phillips
 - 54,⁰⁰
 - EUR net



- · 2 K impact screwdrivers
- · Slot-head and cross-head PH with hexagonal shaft and striking
- · for attachment point with continuous blade and strike plate
- made of CV steel for direct impact transfer from plate to tip

slot-head 1 x 3.5 | 1 x 4.5 | 1 x 5.5 | 1 x 6.5 cross-head 1 x PH1 size 5 | 1 x PH2 size 6





ROLL REPRESSIVE

Hex key set



- 9 pieces: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm
- · Chrome vanadium steel, bright nickel-plated
- · long design
- · hex/ball-end combined
- the ball-end allows you to screw up to a 30° angle
- · unfolding plastic holder allows free access
- · with belt clip

Art. no. 114

9 pieces, size: 1,5 - 10 mm



Claw-typee gripper magnetic

Everything is under control!

- flexible claw-type gripper, length 60 cm
- ideal for gripping screws, nuts etc. that are difficult to reach
- the claw, with, spring-action-system', can be opened up to
- the additional magnet lifts metal parts up to 400 g
- the integrated LED allows to find dropped small-parts even in dark corners

Art. no. 1830

Length: 600 mm

EUR net 12,00











Bit set | 32 pieces | colour-coded

1/4"

- Supplied in a plastic box with a belt clip
- · S2 steel, chrome-plated with colour-coding
- 32 pieces:

1 bit holder with quick release 1 adaptor for 1/4" 30 bits

Content	Colour	Sizes	Pieces
cross slot Philips	•	PH Gr. 1, 2, 2, 3	4
cross slot Philips		PZ Gr. 1, 2, 2, 3	4
slot		3, 4, 5, 6 mm	4
allen key	0	3, 4, 5, 6 mm	4
Tx	O	Tx 10, 15, 20, 25, 27, 30, 40	7
Security Tx	❷ ●	STx 10, 15, 20, 25, 27, 30, 40	7

Art. no. 2145

32 pieces

22,⁵⁰



Bath installation set "deluxe" | 16 pieces

1/2"

Art. no. 677-1 16 pieces

EUR net 260,00

16 pieces, Content:

- · S-bend connector assembly tool, 3/4"
- · Corner valve screwing aid
- . Universal screw bit up to 21 mm
- · Valve holder for eccentric and standard valves
- · Toilet seat assembly wrench
- · Ratchet wrench, 4 in 1
- · Combination basin cock wrench 13 mm with 5 bits 9, 10, 11, 12, 14 mm and 1 claw
- · Deep hole marker for all surfaces
- · Reversible ratchet, 1/2", CV steel, with internal and external square drive bit
- · Hanger bolt screwdriver Ø 10 mm



Combination washbasin tap wrench

- for all fittings up to 14 mm, size 32 mm
- 4 inserts in shank: 9, 10, 11, 12 mm + 13 mm as shank
- · switchable claw with spring
- · knurled handle
- Sizes 8 and 14 mm on request Art. No. 655-1/8 and 655-1/14



EUR net 42,⁰⁰









Assembly Connection Gauge

- · Supplied in an impact-resistant plastic case
- dimensional and spatial alignment of all common installation inside dimensions 1/2" in bare brickwork
- · easily readable circular bubble and with depth adjustment
- fixed adjustment increments: 75, 100, 120, 153, 200, 240 mm
- · also fits for assembly rails 150 mm
- for bathtubs and shower mixers, corner and flush-mounted valves, pipe ventilators

Art. no. 2845

Stitch dimensions 1/2"

99,00



Valve extension cutter with chip collection

- for trimming 1/2" valve extensions made of red brass
- · with SDS chuck adaptor
- rubber cap collects the milled chips

Art. no. 705/1/2

Stitch dimensions 1/2"



Valve holder

1/2"

Art. no. 725

Length 120 mm

· to lock eccentric and standard valves in place, when installing siphons and drains, on washbasins and sinks etc.

EUR net $26,^{50}$

BRIMKO 725

- · with a flexible T-handle
- · length 120 mm





Duo valve holder

Art. no. 726

Length 134 mm

EUR net 33,<u>00</u>

NEW

Chrome-plated drain fittings installed in sinks tend to get scratched during installation, leading to customer frustration. To prevent this, there's the Automatic Duo Valve Holder. The Duo valve holder is inserted from the top into the drain valve and locks

into place. Now, holding it during installation is no longer a problem, and there's no risk of slipping that could damage the chrome plating.

- For drain fittings in sizes 1" and 1 1/4"
- For use with a 1/2" drive."











Toilet seat & sanitary installation wrench "BRImultiKey" 19 in 1

The BRINKO Toilet seat & sanitary installation wrench 'BRImultiKey' 19 in 1 is a multi-talent for the different screw connections on toilet seats, and adapters on water taps and fittings (Perlators/aerators).

Art. no. 662
17 mm | ½ Inch

EUR net
14.00

You practically do not need any other tools because this universal wrench combines almost everything in one tool.


- · Up to 19 adapter options
- Application with larger torques on very tight or rusted nuts, wing nuts, perlators or aerators
- Attractive form, comfortable and pleasant handles
- Reversible inserts (red) as a 'click system' for various sanitary attachments
- · Adapter options for 17 mm open-end wrench
- Inner adapter for wrench handle for a 1/2 inch ratchet wrench extension
- Universal wrench made of very durable and tough plastic PA6 (polyamide) and 30 % glass-fibres

WITHOUT an adapter:

Up to 11 different wing nuts of the toilet seat can be opened or screwed on.

WITH adapter:

Open and/or screw on 10 mm nuts (M6 threaded rods) or 13 mm nuts (M8 threaded rods).

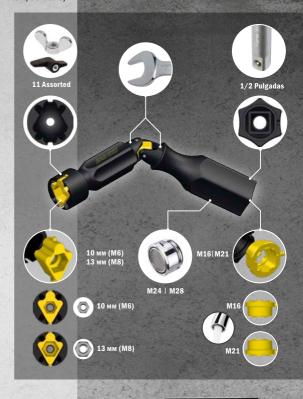



Carbon steel, stainless steel pipe cutter

Special pipe cutter for INOX, C-steel and Cu pipes For pipes with Ø 3 35 mm or 1", up to 3 mm wall thickness

- · magnesium die casting
- especially light 1/3 lighter than aluminum | almost 1/2 lighter than zinc diecast | 200 g lighter than 633-70/35 yet as strong as zinc die-cast
- · best strength/weight ratio of any metal
- · easily 100 % recyclable
- · modern material, increasingly also used in automotive engineering
- · powdercoated (not smoothly painted), thus better feel/grip for dirty (oily, greasy)/sweaty hands

Guide rollers

- needle bearing | 2 needle bearings per roller stainless steel
- · no more recess for cutting close to the flange, thus optimal guiding of the Inox tube

Fast running spindle

- · extra strong
- · zinc die casting
- · high dimensional accuracy
- · high surface quality (low roughness)
- · easy to machine: high accuracy

Integrated rotary deburrer

- Noga deburrer (one of the best blade manufacturers in the
- · removable, easier deburring without moving the whole RAS

Spare cutting wheel

- Art. No. 633-75A
- size: 19 x 5 mm
- Additional spare wheel in the handle!
- · change without additional tool

Handle

- · zinc die casting
- · easy to bring the wheel to the tube due to the heavier zinc diecast swing whandle

Cutting wheel with needle bearing









Pipe Ø 3 - 35 mm

EUR net



haupa.com







Cutting wheel | Stainless steel, carbon steel, copper

- · replacement cutting wheel with needle bearing
- suitable for stainless steel, carbon steel, copper
- suitable for: Art. no. 633-71/35
- Outer Ø 19 mm
- Inner Ø 5 mm
- · Thickness 5 mm

Art. no. 633-75A

Pipe Ø 8 - 28 mm

12.50



Ratchet cut | stainless steel, carbon steel

Problem-solver for pipes that are already installed

- specially for cutting stainless steel, carbon steel and copper pipe, Ø 8 – 28 mm
- the fine ratchet functions makes it easy to cut the pipes
- · easy to adjust the spindle
- replacement cutting wheel Art. no. 622-1

Art. no. 622/28

Pipe Ø 8 - 28 mm

100,⁵⁰



BRINKO 622/28

Cutting wheel | Stainless steel, carbon steel, copper

- replacement cutting wheel suitable for stainless steel and carbon steel
- suitable for: Art. no. 622/28
- · Outer Ø 19 mm
- · Inner Ø 6 mm
- · Thickness 3 mm

Art. no. 622-1

Pipe Ø 8 - 28 mm















INOX pipe cutter Plus with deburring unit

Special pipe cutter for INOX pipes Ø 6 - 76 mm, 1/4 - 3"

· fast feeder system

Integrated rotation deburring unit

- Noga deburring unit (one of the world's best manufacturers of blades)
- detachable, easy deburring without having to move the entire RAS

Guide rolls

- · 4 guide rolls made of INOX steel for optimum hold of the pipe
- guide rolls with needle bearings | 2 needle bearings per roll stainless steel rolls
- no more prior puncturing for cuts close to the seam, this allows optimum guidance of the Inox pipe

Cutting wheel

- · fast exchange of cutting wheels without tools
- cutting wheel with needle bearings for INOX, Art. No. 627-71
- size: 19 x 6,2 mm
- · extra spare wheel in the handle !!!

Art. no. 627-70

Pipe Ø 6 - 76 mm

89,00



Cutting wheel | Stainless steel

- · replacement cutting wheel suitable for stainless steel
- suitable for: Art. no. 627-70
- Outer Ø 19 mm
- · Inner Ø 5 mm
- Thickness 5 mm

Art. no. 627-71

Pipe Ø 6 - 76 mm

12 50



Plastic pipe scissors

For one-hand operation with automatic blade retraction

- for Ø 6 35 mm
- · for separating hard and soft plastic pipes, cable ducts, fibre-reinforced plastic and rubber hoses, pipes made of composite material and polypropylene
- · little strength required due to ratchet technology
- · straight and distortion-free, right angles cuts
- · no problem blade change

Art. no. 634/35

Ø 6 - 35 mm

EUR net 44,00

(4)

Pipe deburrer

- · for internal and external deburring of stainless steel, brass, aluminium and plastic pipes
- · robust quality tool: stiff aluminium housing and very fine deburrer blade

Art. no. 648/35

Pipe Ø 8 - 35 mm

49,50

Art. no. 648/54

Pipe Ø 10 - 54 mm











Automatic plastic tube shears

- · with lever transmission
- for tubes in PVC, PE, PD, PEX, PVDF with a wall thickness of up to 2 mm and composite tubes
- single-hand operation and recoil-free ratchet mechanism, high safety standard
- durable blade made of tempered steel with a precise angle for easy cutting of plastic tubes, with V-cut
- · little power required thanks to special teeth design
- precise pinpoint cut without deformation of the tubes, wide tube base
- rubber-coated handle and powder-coating for a secure hold without slipping
- · transport lock and latch
- · blade with fast retraction
- · easy blade exchange

Art. no. 635/35

Pipe Ø 35 mm

45,00

Art. no. 635/42

Pipe Ø 42 mm

EUR net 49,50









Hydraulic pipe bending set | Basic metal

Supplied in a strong plastic case:

1 hydraulic hand pipe bending tool

5 bending segments, die-cast aluminium, 10, 12, 15, 18, 22 mm 3 dollies

- for soft copper pipes, coated copper and soft steel pipes \emptyset 10 22 mm
- for stainless steel pipes Ø 10 15 mm
- bends up to 90°
- bending radius 4x diameter
- to refill the oil, please use "Shell Morlina S2 BL 10" (formerly "Shell Tellus C 10")

Art. no. 637

9 pieces

EUR net

625,⁰⁰











Hydraulic pipe bending set | Combined

Supplied in a strong plastic case:

1 hydraulic hand pipe bending tool

9 bending segments, aluminium pressure die-casting, 10, 12, 15, 16, 18, 20, 22, 26, 32 mm

5 dollys

- for soft copper pipes, sheathed copper and soft steel pipes \emptyset 10 22 mm
- for stainless steel pipes Ø 10 15 mm
- for composite pipes Ø 12 32 mm
- bends up to 90°
- bending radius 4 x diameter
- to refill the oil, please use "Shell Morlina S2 BL 10" (formerly "Shell Tellus C 10")

Art. no. 637-10

15 pieces

910,⁵⁰



HD-Hand Inspection Camara "BRIcamS"

- . 5 inch LCD HD high resolution screen for real time display
- · High-quality CMOS sensor (camera) with a resolution of 1280 x 720 pixels (camera head Ø 8 mm)
- HD resolution screen with 1920 x 1080 and 1280 x 720 options
- · Photo and video recording to Micro SD-card
- Triple LED brightness adjustment of camera light and screen illumination
- · 1 meter swan-neck camera with IP67 waterproofing
- 4000 mAh, 3.7 volt lithium-ion battery provides up to 5 hours of standby time
- · Supports seven languages: English, French, German, Spanish, Italian, Japanese, Chinese

Art. no. 3780

5-Inch-LCD-HD

EUR net 163,50



Content:

- · Screen Unit
- 1 Meter Swan-Neck Camera with Ø 8 mm Camera Head
- · User Guide
- · Threading-Attachable Hook
- · Threading-Attachable Magnet
- Threading-Attachable 90° Mirror
- · Charging cable USB-C to USB-A USB-A charger

















Pipe inspection camera system "BRIcamL"

Video inspection system for visual inspection of pipes, hollow bodies and spaces as well as finding blockages or damage!

Pipe inspection camera system BRIcamL with a swivelling camera head, only 28 mm diameter and 40 m fiberglass cable, intelligent compact design combined with simple operation and easy transportation, thanks to the aluminium frame.

This waterproof system is complete with transmitter module can be used between and can be detected, tracked and located by locating devices, operating at 512 Hz. The camera head of the BRIcamL can be rotated 360° and swiveled by 210° and enables an exact Driving through connections and checking pipe branches. The display unit is surrounded by a robust, waterproof and airtight plastic case and can be used in cramped working conditions or for better transport of the sperated push cable unit.

On the 10" TFT monitor with a Resolution of 800 x 600 pixels the smallest Defects will be recocnized and the number of meters inserted are shown. The BRIcamL is equipped with a multifunctional Control panel with QWERTY keyboard for entering text, as also an integrated microphone for voice recording during video recording on SD card or USB stick. This intelligent system even has a device for cleaning the fibre cable after use by pushing it back, which removes adhering water and impurities. These are collected in the waterproof body, which can then be emptied outdoors.

By unscrewing the transmitter unit and inserting an optional adapter, bends from DN50 upwards are possible. This system can also be operated with a 10 or 20 meter long hand reel with a \emptyset 12 mm camera head.

Content:

- · 360°/210° rotating/swivelling camera head Ø 28 mm
- Camera cable: Ø 7mm/40 metres long
- · Steel coil, Meter counter
- · 6-pin camera connection
- · Cleaning brush
- 512 Hz sender
- IP68 Multifunctional control device in the IP66 case, 10" TFT monitor with USB/SD recording
- . Text and voice input using the OWERTZ keyboard
- Control buttons for swivelling camera head
- · Operated with 6600 mAh Li-Ion battery or current
- · Mains adapter, Guide ball and star for camera head
- · Video cable 1 metres 6-pin, Remote operation

Art. no. 3741

DN70 - DN160

5.500,00























Pressure testing pump

- · for safe tightness testing on water pipes
- brass piston, 1/2" hose connection
- · test pressure up to 60 bar
- · storage tank 12 I, painted red
- tank dimensions 500 x 180 x 140 mm
- replacement manometer Art. no. 7640-1
- replacement pressure hose Art. no. 7640-2

Art. no. 7640

60 bar

EUR net 187.00



Pressure testing pump stainless steel

- · for safe tightness testing on pipes
- · in particular with chemically contaminated, aggressive liquids
- · also suitable for solar panel systems and underfloor heating systems
- 1/2" hose connection
- · test pressure up to 60 bar
- storage tank 12 I made of STAINLESS STEEL
- · per stroke 0.027 litres
- tank dimensions 500 x 190 x 140 mm
- replacement manometer Art. no. 7641-1
- replacement pressure hose Art. no. 7640-2



60 bar

 $280,\frac{50}{}$











Pipe cleaning pump • Suction and pressure cleaner for blocked pipes • short attachment for washbasins and sinks • long attachment for WC Art. no. 3722 Length 55 cm EUR net 89,50

Water pressure drain cleaner

• Ingeniously removes blockages in drainpipes with high pressure

- for pipes Ø 40 150 mm
- including 1.5 m hose with adaptor, hose connection 1/2" x 3/4" IG
- · patented pressure balloon

Art. no. 3730/1

Pipe Ø 40 - 80 mm

EUR net 55,<u>00</u> Art. no. 3730/2

Pipe Ø 80 - 150 mm

EUR net **108**,00



















Sealing balloon

- · easily seal pipes
- pneumatic sealing system for various pipe diameters
- · insert, inflate, work
- suitable for compressed air hose Art. No. 3800-2 and to the air pump with manometer Art. No. 3800-3

Art. no. 3800-1/1

Pipe Ø 30 - 50 mm

EUR net

Art. no. 3800-1/2 Pipe Ø 50 - 80 mm

EUR net

105,00

120,00


Art. no. 3800-1/3

Pipe Ø 70 - 100 mm

139,⁰⁰

Art. no. 3800-1/4 Pipe Ø 90 - 150 mm

295,00











Compressed air hose

- · extension hose for sealing bubbles
- · can be extended as required
- · length 3 m





... convincing solutions

Plug for inner pipe

Mechanical pipe sealing system for inner pipe

- ideal for sealing drain pipes and for long-term applications
- · easy to insert and secure due to extra large wing nut
- · resistant to use and waste water
- · suitable for all types of pipest
- · maximum counterpressure: 1.2 bar or 12 m
- . Housing made of glass-fibre reinforced ABS plastic
- · sealing ring based on natural rubber
- Galvanised threaded screw and wing nut corrosion-resistant

Original Gripper - tested and proven, the most preferred mechanical shut-off discs on the market

Maximum Counter Pressure 1,2 bar corresponds to a 12 m water column

Art. no. 3806/1

Pipe Ø 96 - 103 mm

43,00

Art. no. 3806/2

Pipe Ø 147 – 154 mm

73,00

Art. no. 3806/3

Pipe Ø 196 - 204 mm











Plug for end pipe

Mechanical pipe sealing system for end pipe

- ideal for sealing drain pipes and for long-term applications
- · easy to insert and secure due to extra large wing nut
- · resistant to use and waste water
- · suitable for all types of pipest
- · maximum counterpressure: 1.2 bar or 12 m
- · Housing made of glass-fibre reinforced ABS plastic
- · sealing ring based on natural rubber
- · Galvanised threaded screw and wing nut corrosion-resistant

Original Gripper - tested and proven, the most preferred mechanical shut-off discs on the market

Maximum Counter Pressure 1,2 bar corresponds to a 12 m water column

Art. no. 3805/1

Pipe Ø 39 - 42 mm

EUR net 18,00

Art. no. 3805/2

Pipe Ø 49 - 55 mm

EUR net **21**,00

Art. no. 3805/3

Pipe Ø 71 - 79 mm


28,00

Art. no. 3805/4 Pipe Ø 96 – 103 mm

38,00

Art. no. 3805/5

Pipe Ø 147 - 154 mm





Glass tile drill

Single Drill

- · optimally designed for cordless power tools
- 1/4" hexagonal shaft
- · pointed chisel edge enables precision drilling, can be re-shar-pened
- · shaft diameter 6.35 mm

Please note: Only use in rotation (low rotation speed) and in sufficiently cool.

Areas: ceramics, tiles, hard-fired tiles, glass, acrylic glass, mirror glass

Art. no. 1368-1/5

Ø 5 x 75 mm

EUR net 7,<u>50</u> Art. no. 1368-1/6

Ø 6 x 75 mm

EUR net 8,00

Art. no. 1368-1/8

Ø 8 x 85 mm

Art. no. 1368-1/10

Ø 10 x 90 mm

EUR net 11,⁷⁰

EUR net $15,\frac{30}{}$

Art. no. 1368-1/13

Ø 13 x 100 mm

18,00

Art. no. 1368-1/14 Ø 14 x 100 mm

21,00



Glass tile drill set

- 5 piece
- Sizes: 2 x 6, 2 x 8.1 x 10 mm
- · optimally designed for cordless power tools
- · 1/4" hexagonal shaft
- · pointed chisel edge enables precision drilling, can be re-shar-pened
- . shaft diameter 6.35 mm

Please note: Only use in rotation (low rotation speed) and in sufficiently cool.

Areas: ceramics, tiles, hard-fired tiles, glass, acrylic glass, mirror glass

Art. no. 1368

5 pieces

EUR net









Drilling without a centring aid

- connector M14 to be used with the angle grinder
- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm)
- special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled

Art. no. 1381-1/6

Ø6mm

Ø 8 mm

EUR net 14,⁵⁰

Art. no. 1381-1/8

Art. no. 1381-1/10

EUR net

14.⁵⁰

Ø 10 mm

Art. no. 1381-1/12

Ø 12 mm

EUR net 14.⁵⁰

EUR net 15,50

Art. no. 1381-1/14

Ø 14 mm

 $15,\frac{50}{}$





DIAMOND core drills set "BRIdiamondDrill"

Drilling without a centring aid 7-pieces: Ø 2 x 6, 2 x 8, 10, 12, 14 mm

- connector M14 to be used with the angle grinder
- · hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled















Drilling without a centring aid 7 pieces: Ø 3 x 6, 3 x 8, 10 mm

- · connector M14 to be used with the angle grinder
- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8.000 - 14.000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled

Art. no. 1381-7

7 pieces

EUR net $100,\frac{50}{}$























Drilling without a centring aid 7 pieces: Ø 2 x 6, 8, 10, 12, 14 mm

- 1 Centering Guide stainless 5 40 mm · connector M14 to be used with the angle grinder
- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled

Art. no. 1381-6

7 pieces

EUR net 125,⁵⁰













Drilling without a centring aid 4 pieces: Ø 2 x 6, 8, 10 mm

- · connector M14 to be used with the angle grinder
- hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled

Art. no. 1381-4

4 pieces

EUR net 57,50























Advantages of the DIAMOND drills:

- · precise positioning, minimum risk of slipping off
- · Safety, Fast, Efficiency & Sophisticated design
- · special wax filling ensure cooling, no cooling water required
- hex shank Ø 8,2 mm
- · wax filled core helps cooling and lubricates, need not watering
- · a strong bond is made through the brazing process extending
- · Diamond coated design reduces cutting heat for 5x longer working life

Reliable cutting, drilling & grinding in the following materials:

- · floor and wall tiles, hard porcelain
- · granite and marble
- · glass and fiberglass

Art. no. 1379-3/5

Pipe Ø 5 mm

EUR net $14,\frac{50}{}$ Art. no. 1379-3/6

Pipe Ø 6 mm

EUR net 14,⁵⁰

EUR net

14,⁵⁰

Art. no. 1379-3/8

Pipe Ø 8 mm

EUR net $14,\frac{50}{}$ Art. no. 1379-3/10

Pipe Ø 10 mm

Art. no. 1379-3/12

Pipe Ø 12 mm

15,50



BRINKO*8mm















Drilling without a centring aid 4 pieces: Ø 2 x 6, 8, 10 mm

- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled

Art. no. 1379-4

4 pieces

EUR net 57,50























Drilling without a centring aid 7 pieces: Ø 2 x 6, 8, 10, 12, 14 mm 1 Centering Guide stainless 5 - 40 mm

- hex shank Ø 8 mm
- · hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled

Art. no. 1379-6

7 pieces

EUR net $125,\frac{50}{}$













HSS-bi-metal hole saw set | Plumbing standard

For sanitary work

• supplied in unbreakable plastic case, 6 pieces: 5 HSS-bi-metal hole saws Ø 44, 57, 68, 75, 114 mm, 4 - 6 tpi 1 SDS chuck adaptor with HSS drill

- cutting depth 40 mm
- · for steel, Nirosta, non-ferrous metals, HAT pipe, wood and aerated concrete
- · also ideal for switches and sockets
- · all hole saws are also available individually Art. no. 1380

Art. no. 1384

6 pieces

EUR net $125,\frac{50}{}$











Double-hole punch

To securely fasten mixer taps and spigot taps in kitchen sinks and other sheet materials, precise and accurately sized mounting holes are required.

With the double-hole punch, mounting holes in the most commonly requested sizes Ø 32 mm and Ø 35 mm can be created cleanly and without contamination.

The double-hole punch is suitable for the following thicknesses:

- · Iron, steel, copper, and aluminium sheets up to 2 mm
- Stainless steel sinks and other stainless steel sheets up to 1.5 mm

Art. no. 914

Ø 32 + 35 mm

52,50

















Ø 32 mm Hole diameter



Ø 35 mm Hole diameter

Deep-hole marker 2-in-1 with a sharpener

One pen - two functions

With a cap: Retractable pencil for precise marking and writing Without a cap: Deep-hole marker for drilling and installation tasks

- · very stable, with a practical clip
- sharpener integrated into the push-button
- · graphite universal refill for marking on rough and smooth surfaces
- · ergonomic, triangular form
- · preserves resources and is environmentally-friendly
- · designed for various refills for almost all surfaces and materials

Art. no. 2528

black | yellow

EUR net



DRY Profi

Effective pressing mechanism for automatic lead propulsion in robust stainless steel tube

- · easy one-handed operation thanks to improved clip
- · integrated sharpener with guide for fast sharpening at any
- · leads can be replenished from the front or back
- for all surfaces (wood, metal, glass, ceramics ...)
- · special graphite lead included can be wiped off smooth surfaces with a damp cloth
- · separately available coloured leads, water soluble or waterproof
- · available in colour sets or individual colours for versatile use on light and dark backgrounds



Length 150 mm

15,⁵⁰







0





Universal knife "Das Original" BRINKO cutter knife ergonomic 2-component handle with soft plastic super-sharp, double-ground blade width 18 mm, thickness 0.5 mm blade feed with automatic lock 2 replacement blade strips in the handle colour: yellow, black Art. no. 2980 160 x 45 x 25 mm EUR net 5,00 The string in the strips in the handle BRINKO cutter knife BRINKO cutter knife BRINKO cutter knife





Art. no. 2982 Blade dispenser "Black Blades" 100 x 18 x 0,5 mm "Original" BRINKO "Black Blades" Cutter blades, 10-part, suitable for Art. no. 2980 4,00 · super sharp blade for precise cuts · reinforced design · fits all conventional cutter knives · dual edge for maximum sharpness · maximum lifespan thanks to flame hardening process · ideal for various materials · blade is coated black "Original" BRINKO "Black Blades" · delivered in a dispenser · 8 segments • 100 x 18 x 0,5 mm **10** x SUNKO Blades Blades Blades Brinkes Blades Brinkes Brin

Fitter's hammer with 3-component handle

Vibration-free fitter's hammer with 3-component handle.

The hammer head with the forged safety collar according to DIN 1041 and rubber protection sheath is secured mechanically in the handle with a heavy steel wedge. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Benefits:

- · Shock-absorbing, therefore gentle on the joints
- · High-safety handle is indestructible
- . The handle is permanently connected to the hammer
- · Non-slip handle allows ergonomic and safe work
- · Highest possible level of safety



Weight 300 g

EUR net **21**.50 Art. no. 1475/500

Weight 500 g

EUR net 25.⁵⁰

Art. no. 1475/1000

Weight 1000 g

36.00



Club hammer with 3-component handle

Vibration-free club hammer with 3-component high-safety handle.

The hammer head with the forged safety collar according to DIN 6475 and rubber protection sheath is secured mechanically in the handle with a heavy steel wedge. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Benefits:

- · Shock-absorbing, therefore gentle on the
- · High-safety handle is indestructible
- . The handle is permanently connected to the
- · Non-slip handle allows ergonomic and safe
- · Highest possible level of safety













Soft-faced hammer with 3-component handle

Soft-faced hammer with 3-component high-safety handle and steel middle element.

Ideal for firm yet gentle hammering during installation work, alignment and attachment. White polyamide inserts are connected to the middle part by means of a dual-locking attachment system; this guarantees absolute safety at work. The inserts can be replaced and ordered separately. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Note: Not recoil-free!

Benefits:

- · Shock-absorbing, therefore gentle on the joints
- · Dual-locking attachment system of the polyamide inserts
- · High-safety handle is indestructible
- The handle is permanently connected to the hammer head
- · Non-slip handle allows ergonomic and safe work
- · Highest possible level of safety

Art. no. 1480/32

Head Ø 32 mm

EUR net 32,00 Art. no. 1480/40

Head Ø 40 mm

EUR net 44.00



Tool case "plumbing"

Hard-top case, black

- dimensions 480 x 370 x 225 mm
- · alu frame
- · non-slip carrying handle
- · 2 locks
- · with shoulder strap
- · reinforced metal corners as additional protection against damage


Art. no. 7410

empty, 480 x 370 x 225 mm

EUR net 125,⁵⁰



Inside:



· document pocket

· bottom half of case equipped with variable





















Young technician toolbox - Plumbing/heating

Hard-top case, black, fitted with 23 special tools

- dimensions 480 x 370 x 225 mm
- · black alu frame, non-slip carrying handle, 2 locks, with shoulder
- · reinforced metal corners as additional protection against damage
- · 2 tool kits completely removable, document pocket, bottom half
- · equipped with variable partitions

Content:

• 83 Ratchet wrenches 4 in 1, 10 x 13 und 17 x 19 mm

• 105/10 Plumbing installation wrench

• 128 Universal screw insert Ø 9 - 21 mm

• 129-9 Connecting square 1/2"

• 633/35 Pipe cutter with deburrer to Ø 32 mm • 655 Combination washbasin tap wrench

• 662 Toilet seat & sanitary installation wrench

BRImultiKey 19 in 1

• 675 Step wrench set 86 mm Water pump pliers 250 mm • 687/250

• 689/240 Fittings pliers | Key pliers 240 mm

• 1470/300 Cross peen hammer 300 g

• 1728/146 Universal bow saw

• 2126/7 Screwdriver set, 7 pieces

> 4 slot-head screwdrivers 75 x 2.5, 100 x 4, 125 x 5.5, 150 x 6.5 mm

2 cross-head screwdrivers PZ 1, PZ 2 1 Safety voltage tester 150 - 250 Volt

• 2528 Deep-hole marker 2-in-1 with a sharpener

• 2980

• 180094 Electrician's chisel 200 x 12 mm


Art. no. 7421

23 pieces, 480 x 370 x 225 mm

EUR net 357,00

ABS **

NEW

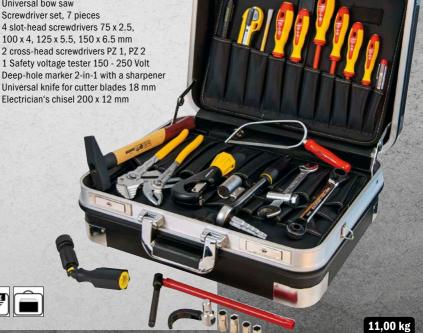







Apprentice case "BRIbasic"

Hard case, black, fitted with 14 special tools

2 tool boards and document pocket completely removable, lockable, incl. 2 keys, bottom tray with variable dividers made of aluminum, reinforced metal corners as additional protection against damage, Tool case empty, Art. no. 220030

Content:

 Screwdriver set 6 pieces, Art. no. 2122 4 slot-head screwdrivers 80 x 3, 100 x 4, 125 x 5.5, 150 x 6.5 mm

2 cross-head screwdrivers PZ 1, PZ 2

- Water pump pliers 240 mm, Art. no. 680/240
- Cross peen hammer 300 g, Art. no. 1470/300
- Pipe cutter, Art. no. 633/35
- · Universal knife, Art. no. 2980
- Plumbing installation wrench, Art. Nr. 105/10
- · Universal bow saws, Art. no. 1728/146

• Hex key set, 7 pieces, 2.5, 3, 4, 5, 6, 8, 10 mm, Art. no. 111/2

· Spirit level, Art. no. 2839

. Tool case empty, Art. no. 220030





14 pieces, 460 x 350 x 180 mm

8,88 kg

EUR net $206,\frac{50}{}$














Tool case "Plumbing EXCLUSIVE"

Hard-top case, black, fitted with 37 special tools

- dimensions 480 x 370 x 225 mm
- black alu frame, non-slip carrying handle, 2 locks, with shoulder
- · reinforced metal corners as additional protection against damage
- · 2 tool kits completely removable, document pocket, bottom half
- · equipped with variable partitions

Content:

• 22-1/300 Instrument key 300 mm

• 56 Open-end wrench 10 x 13 mm / 17 x 19 mm

• 92 Socket wrench 10 x 11, 12 x 13, 17 x 19, 19 x 22

• 105/10 Plumbing installation wrench • 106-2 Plumbing four-way socket wrench

• 114 Hex key set, • 129-3/250 Reversible ratchet

• 129-7/125 Extension

• 129-12 BRImultiLock insert 10, 13, 17 mm • 619/1 Corner pipe pliers 320 mm, 49 mm, 1"

• 631-5 Miniature pipe cutter

• 633/35 Pipe cutter with deburrer up to Ø 35 mm / 13/8",

up to Ø 32 mm / 1 1/4"

• 655 Combination washbasin tap wrench

• 673/86 Step wrench 86 mm

• 685-1/240 Water pump pliers 240 mm

1333/200-10 Electrician's chisel 10 mm

• 1470/500 Cross peen hammer 500 g

1654-1/250 Engineer's file | half round

• 1710 Burner brush

• 1726/146 Universal bow saws

• 2070/125 Slot-head screwdriver 5.5 x 125

• 2070/150 Slot-head screwdriver 6.5 x 150 • 2080/1 Screwdriver | PZ1 x 80 / 2 - 3 mm

• 2080/2 Screwdriver | PZ2 x 100 / 3 - 5.2 mm

Voltage tester • 2088/145

• 2524/235 All-purpose pencil 235 mm

• 2705/2 Cutting Folding ruler 2 m

• 2980 Universal knife

• 2999-1/25 Solder water brush

25 mm. 1"

• 3820 Hemp dispenser

• 2836/400

Lightweight metal spirit

level 400 mm











37 pieces, 480 x 370 x 225 mm

EUR net 508.00

ABS ***



Cordless Pressing Tool ACO103 BT | 4.0 Ah

Comfort Line ACO102 - compact and powerful efficiency - NEW WITH BLUETOOTH

Supplied in case:

cordless pressing tool, 1 battery 12 V 4.0 Ah Li-lon, 1 charger storage space for up to 6 press jaws PB1

- · Data transfer via Bluetooth®
- for press connections 12 35 mm metal, 16 40 mm plastic
- · automatic pressing process, bolt retention
- particularly suitable for tight pressing space and installation situations
- real single-handed operation: 1.7 kg light, 32 cm long (without press jaw), ergonomic shape
- LED display with electronic display: pressing force monitoring, battery charge monitoring, error messages
- output: 240 W, piston force: 19 kN, piston stroke: 30 mm
- battery: 12 V Li-Ion 4.0 Ah, battery capacity: 40 180 pressings, charging time: approx. 30 – 60 min
- compatible with novopress PB1 press jaws Art. no. 625-20 to -25



Art. no. 625-1PM/AC0103

Pipe Ø 12 - 40 mm

1.693,00













Cordless Pressing Tool ACO203 BT | 5.0 Ah

Comfort Line ACO203 - a new generation of pressing technology - NEW WITH BLUETOOTH

Supplied in case:

cordless pressing unit, 1 rechargeable battery 18 V 5.0 Ah Li-lon, 1 charger, storage space for up to 6 press jaws PB2

- · Data transfer via Bluetooth®
- for press connections 12 54 (108) mm metal, 16 110 mm plastic
- fits securely in your hand: 2.8 kg, 39 cm long (without press jaw), ergonomic shape
- · Features: pressing area illumination, implemented force monitoring and diagnosis function, innovative brushless motor technology for faster pressing process and more pressings per battery charge
- · output: 450 W, piston force: 32 kN, piston stroke: 40 mm
- rechargeable battery: 18 V Li-Ion 5.0 Ah, battery capacity: up to 250 pressing processes, charging time: 60 min
- · compatible with novopress PB2 press jaws Art. no. 625-30 to -35 and novopress PS2 press collars Art. no. 625-40 to -45



Art. no. 625-5PM/AC0203

Pipe Ø 12 - 110 mm

EUR net

 $2.286,^{50}$



8,30 kg

V-Press jaw set

Press jaws also wear out during use. Replacing them guarantees the safety of the pressing process and safeguards the worker by using suitable press jaws.

BRINKO offers the most commonly used sizes V15, V22, V28, and V35 in a specially equipped BRINKO box with the V-Press jaw set. The BRINKO box has 2 additional slots where intermediate sizes like V12 and V18 can be stored, as well as a compartment for additional equipment such as pipe cutters or deburrers.

Art. no. 625-10SE

4 pieces

619,⁵⁰



Contents:

V-Press jaws V15, V22, V28, and V35











M-Press jaw set

Press jaws also wear out during use. Replacing them guarantees the safety of the pressing process and safeguards the worker by using suitable press jaws.

BRINKO offers the most commonly used sizes M15, M22, M28, and M35 in a specially equipped BRINKO box with the M-Press jaw set. The BRINKO box has 2 additional slots where intermediate sizes like M12 and M18 can be stored, as well as a compartment for additional equipment such as pipe cutters or deburrers.

Contents:

M-Press jaws M15, M22, M28, and M35

Art. no. 625-13SE

4 pieces

619,⁵⁰

NEW



Suction Cup

Guaranteed the right Suction Cup for your application with the highest degree of security

- plastic body, 2x suction disc Ø 120 mm
- load-bearing capacity: up to max. < ► 80 kg, \$\(\frac{1}{2} \) 40 kg
- guideline value use under the specified value recommended
- · handle is covered with non-slip rubber

Can be used on all materials with smooth, sealed surfaces (e.g. panes of glass, tiles, stone, sheet steel, panels made of coated wood) Safety information:

- the surface of the object and the suction discs must not be greasy
- · before lifting a weight, carry out a test
- · never walk under the load and never lift above yourself or others

Art. no. 1180

0,39 kN

47,00



Tension cable | 8 mm, length 1 m

- Rubber tension cable 8 mm thick and 100 cm long
- latex core
- · with two rubberised universal wire hooks
- approved lashing capacity: 70 N ~ 7.1 kg

Art. no. 1140/8

Length 1 m

EUR net











Breathable protective gloves

- · Nitrile coating, pimpled
- · extremely grippy due to high abrasion resistance
- · very comfortable to wear, hands remain cool and dry

Art. no. 3454/9

Size 9

5,00

Art. no. 3454/10

Size 10

5,00

Art. no. 3454/11

Size 11

5,00



Work gloves "BRIGecko"

- · Premium quality
- 100 % polyamide, finely knitted
- · latex-coated glove palm
- · repels liquid
- · excellent fit







Art. no. 3458/9

Size 9

EUR net **4**, <u>00</u>

Art. no. 3458/10

Size 10

EUR net 4,00

