


haupa®

NEW PRODUCTS 2026



TOP DEAL
valid until
31.01.2027
EN

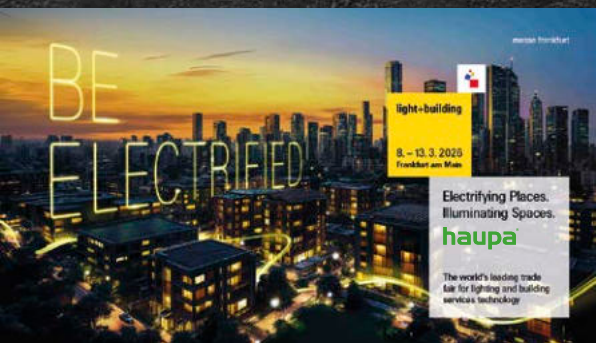

[haupa.com](https://www.haupa.com)

HAUPA INNOVATIONS 2026 – PREMIERE AT LIGHT + BUILDING

At the leading trade fair Light + Building, HAUPA will be presenting genuine innovations in all product areas – for professionals in trade and industry who value quality, safety and efficiency.

All about cables – even more performance

Our range continues to grow: new cable tie variants, including detectable versions for sensitive areas and the new HUPultra cable tie for photovoltaic and outdoor installations. Extremely UV-resistant, durable and reliable – even under the toughest conditions. 15-year durability!

Live Working under voltage – safety redefined

In the VDE range, we are expanding our portfolio with VDE 1000 V torque wrenches as reversible ratchets – with clockwise pull and release function as well as matching inserts. Precision, individually tested safety according to VDE and maximum flexibility for everyday use.

Lighting range – more safety, more flexibility

New safety light strips ensure optimum illumination on construction sites and in industrial environments. We also offer battery-powered versions for maximum mobility and independent working – powerful, robust and practical.

And that's just the beginning: many more new products and system solutions are waiting to be discovered.

HAUPA – expertise to the power of three.

TWIN CRIMPING AT ITS BEST

GUARANTEED
DIN-compliant
connections

HEXAGON PRESSING
0,08 – 16 mm²
TWIN 2 x 10 mm²

FORCED LOCK
Unlockable

**TURN.
ADJUST.
CRIMP PERFECTLY.**
For adjustment to
the desired
wire end ferrule size.

**EVERYTHING
UNDER CONTROL**
Ergonomically shaped
handles



**TOP
DEAL**
p. 30


05.2026

**Crimping pliers
HUPhex16**



Art. No. 212808
Hexagon pressing
0,08 – 16 mm²
TWIN 2 x 10 mm²

HEAVY-DUTY SHELL



PPsafe ****

IP67 

Width | Height | Depth
47 x 36,5 x 14 cm

FOR MAXIMUM PROTECTION

The extremely robust Heavy Duty PP case provides reliable protection for sensitive equipment – dustproof, splash-water resistant, and temperature-resistant from $-30\text{ }^{\circ}\text{C}$ to $+80\text{ }^{\circ}\text{C}$. Thanks to the automatic air-pressure compensation valve, it is suitable for air travel and ideal for transport or professional use. It is stackable, securely lockable, and equipped with a rubberised handle and an ownership label.

**HAUPA system tools – robust, practical,
and ready for use at any time.**




Battery-hydraulic crimping tool SDE240-6 in a heavy-duty case

**TOP
DEAL**
p. 30



- Pressing force in kN: 60
- Working pressure in bar: 700
- **One point crimp**
- Pressing time, battery-operated in sec.: 5
- DIN 46234 10 - 240 mm²
- Cable lugs standard Cu 10 - 300 mm²
- Connectors standard Cu 10 - 300 mm²
- Cable lugs DIN Al 50 - 240 mm²
- Connectors DIN Al 50 - 240 mm²
- Li-Ion battery 18 V 2 Ah, Art. 215523
- Compact charger, Art. 215527

The device also has 1 white LED to illuminate the respective work area.



Art. No. 216669-1-HD


Battery-hydraulic crimping tool S0-6 in a heavy-duty case

**TOP
DEAL**
p. 30














- Pressing force in kN: 60 kN
- Working pressure in bar: 700
- Head can be opened
- Opening/ Hub: 17 mm
- Pressing width: slim, **without dies**
- Pressing time, battery-operated in seconds: ca. 5
- Crimping range cable lugs: standard Cu 6 - 300 mm²
- DIN Cu 6 - 300 mm²
- DIN Al 16 - 340 mm²
- Crimping range connectors: Cu 6 - 300 mm²
- DIN Cu 6 - 300 mm²
- DIN Al 16 - 300 mm²
- Li-Ion battery 18 V 2 Ah, Art. 215523
- Compact charger, Art. 215527

The device also has 1 white LED to illuminate the respective work area.



Art. No. 216801-1-HD

	single wire - conductor class 1
	sector-shaped AL - conductor class 1
	multi-wire - conductor class 2
	sector-shaped - conductor class 2
	fine- and ultra-fine-stranded - conductor class 5 and 6
	communication
	wire rope
	armoured steel cable (SWA)
	ACSR (Aldrey-rope)
	bolt
	solid steel



Battery-hydraulic combo set 1 in system case

TOP
DEAL
p. 30


06.2026








Battery powered crimping tool S0-6M





- with **Sensor-Technologie**
- Pressing force in kN: 60 kN
- Working pressure in bar: 700
- Head can be opened
- Opening/ Hub: 17 mm
- Pressing width: slim, **without dies**
- Pressing time, battery-operated in seconds: ca. 5
- Crimping range cable lugs: standard Cu 6 - 300 mm²
- DIN Cu 6 - 300 mm²
- DIN Al 16 - 300 mm²
- Crimping range connectors: Cu 6 - 300 mm²
- DIN Cu 6 - 300 mm²
- DIN Al 16 - 300 mm²
- Li-Ion battery 18 V 2 Ah, Art. 215523
- Compact charger, Art. 215527
- LED lamp for illuminating work area

Sensor

Battery-hydraulic cable cutter AS6-S50

- For cutting copper and aluminium cables.
- Precise cut with little conductor deformation
 - Cutting force kN: 60
 - Work pressure in bar: 700
 - Cutting width Ø: 50
 - Cutting head 180° rotating
 - Li-Ion battery 18 V 2 Ah, Art. 215523
 - Compact charger, Art. 215527
 - LED lamp for illuminating work area

					
60 kN	700 bar	180°	LI-ION 18V 4Ah		Sensor

Ø 50	Cu AL			
60 kN	700 bar	180°	LI-ION 18V 4Ah	

 **300-06**



Art. No. 216437-1

DREAM COMBINATION TEAM

Battery-hydraulic combo set 2 in system case


TOP
DEAL
p. 30

06.2026

Battery powered crimping tool S0-6M

Sensor


- with **Sensor-Technologie**
- Pressing force in kN: 60 kN
- Working pressure in bar: 700
- Head can be opened
- Opening/ Hub: 17 mm
- Pressing width: slim, **without dies**
- Pressing time, battery-operated in seconds: ca. 5
- Crimping range cable lugs: standard Cu 6 - 300 mm²
- DIN Cu 6 - 300 mm²
- DIN Al 16 - 300 mm²
- Crimping range connectors: Cu 6 - 300 mm²
- DIN Cu 6 - 300 mm²
- DIN Al 16 - 300 mm²
- Li-Ion battery 18 V 2 Ah, Art. 215523
- Compact charger, Art. 215527
- LED lamp for illuminating work area

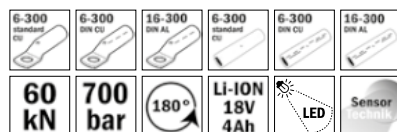

300-06

Battery-hydraulic cable cutter AS7-S65

- For cutting copper and aluminium cables
- Precise cut with little conductor deformation
 - Cutting force kN: 70
 - Work pressure in bar: 700
 - Cutting width Ø: 65
 - Cutting head rotates 180°
 - Li-Ion battery 18 V 2 Ah, Art. 215523
 - Compact charger, Art. 215527
 - LED lamp for illuminating work area



Art. No. 216438-1

CRIMPING WITH DIES



Dies set DIN Cu



12 DIN crimping dies from 10 to 300 mm² in practical transport case



Cu

**TOP
DEAL
p. 30**



Set contains:

Art. No.	Cu	l/no.	PW	kg
216036	10	6	12	0,248
216038	16	8	10	0,248
216040	25	10	10	0,244
216042	35	12	13	0,235
216044	50	14	13	0,231
216046	70	16	13	0,226
216048	95	18	14	0,229
216050	120	20	14	0,225
216052	150	22	10	0,197
216054	185	25	10	0,193
216056	240	28	10	0,185
216060	300	32	10	0,142

Art. No. 216036-SET

Dies set standard Cu



13 standard crimping dies from 10 - 400 mm² in practical transport case



Cu

HUPtype

**TOP
DEAL
p. 30**



Set contains:

Art. No.	mm ²	PW	kg
216008	10	10	0,211
216010	16	10	0,212
216012	25	10	0,210
216014	35	10	0,207
216016	50	13	0,224
216018	70	13	0,221
216020	95	14	0,226
216022	120	14	0,200
216024	150	14	0,200
216026	185	11	0,191
216028	240	11	0,186
216030	300	11	0,200
216032	400	5	0,200

Art. No. 216008-SET

WM-profile dies set standard Cu and for compacted conductors



13 standard crimping dies from 10 - 400 mm² in practical transport case



Cu

HUPtype

**TOP
DEAL
p. 30**



Set contains:

Art. No.	mm ²	PW	kg
216008/V	10	5	0,211
216010/V	16	5	0,212
216012/V	25	10	0,210
216014/V	35	5	0,207
216016/V	50	5	0,224
216018/V	70	14	0,221
216020/V	95	14	0,226
216022/V	120	5	0,200
216024/V	150	11	0,200
216026/V	185	5	0,191
216028/V	240	11	0,186
216030/V	300	5	0,200
216032/V	400	5	0,200

Art. No. 216008/V-SET




Complete range of battery-powered hydraulic pressing, cutting and punching technology

Dies set for tubular cable lugs F-Type



12 F-Type crimping dies from 10 - 300 mm² in practical transport case



TOP DEAL
p. 30



Set contains:


Art. No.	mm ²	PW	kg
216878	10	8	0,146
216880	16	9	0,153
216882	25	11	0,162
216884	35	13	0,171
216886	50	13	0,167
216888	70	13	0,160
216890	95	13	0,164
216892	120	13	0,174
216894	150	13	0,162
216896	185	8	0,124
216898	240	8	0,119
216899	300	8	0,089

Art. No. 216878-SET

Dies set for rounding of sector conductors



12 F-Type crimping dies from 10 - 300 mm² in practical transport case



TOP DEAL
p. 30



Set contains:

Art. No.	mm ²	sm	se	kg
216926	10	10	-	0,120
216928	16	16	-	0,120
216930	25 - 35	25	35	0,120
216932	35 - 50	35	50	0,120
216934	50 - 70	50	70	0,120
216936	70 - 95	70	95	0,120
216938	95 - 120	95	120	0,120
216940	120 - 150	120	150	0,240
216942	150 - 185	150	185	0,197
216944	185 - 240	185	240	0,120
216946	240 - 300	240	300	0,120
216947	300	300	-	0,139

Art. No. 216926-SET

Dies set for tubular cable lugs F-Type



12 standard crimping dies from 10 - 300 mm² in practical transport case



TOP DEAL
p. 30



Set contains:


Art. No.	mm ²	PW	kg
216160	10	8	0,211
216162	16	8	0,216
216164	25	11	0,227
216166	35	13	0,234
216168	50	13	0,232
216170	70	13	0,111
216172	95	15	0,230
216174	120	20	0,247
216176	150	20	0,235
216178	185	8	0,190
216180	240	8	0,179
216182	300	8	0,126

Art. No. 216160-SET

Dies set DIN aluminium



9 DIN crimping dies from 16 - 300 mm² in practical transport case



TOP DEAL
p. 30



Set contains:


Art. No.	mm ²	PW	l/no.	kg
216042/AL	16 - 25	12	12	0,200
216044/AL	35	14	12	0,200
216046/AL	50	16	12	0,200
216048/AL	70	18	12	0,200
216052/AL	95 - 120	22	14	0,200
216054/AL	150	25	14	0,200
216056/AL	185	28	14	0,200
216060/AL	240	32	17	0,200
216062/AL	300	34	17	0,210

Art. No. 216042/AL-SET

Dies set for rounding of sector conductors



8 standard crimping dies from 50 - 300 mm² in practical transport case



TOP DEAL
p. 30



Set contains:

Art. No.	mm ²	sm	se	kg
216088	50	50	70	0,518
216090	70	70	95	0,505
216092	95	95	120	0,489
216094	120	120	150	0,474
216096	150	150	185	0,463
216098	185	185	240	0,441
216100	240	240	300	0,406
216102	300	300	-	0,372

Art. No. 216088-SET

CABLE CHAOS?

... WITHOUT US!



Constant
TENSILE STRENGTH

Detectable cable ties HUPdetect



- **Detectable with standard metal detectors**
- Material: polyamide
- Thanks to continuous metal components in the material, even small pieces can be identified.
- Distinctive blue colouring facilitates visual inspection
- Reduction of contamination risks
- Optimisation of quality assurance in food production, for example within the framework of HACCP concepts for hazard analysis
- Particularly suitable for use in the pharmaceutical and chemical industries as well as in food and animal feed production
- Temperature resistance -40° C to +85° C



Art. No.	Length	W	Height	Width	PU
263210	100	2,5	21	80	100
263212	150	3,5	38	180	100
263214	200	3,5	52	180	100
263216	200	4,6	54	220	100
263218	290	4,6	81	220	100
263220	370	4,6	106	220	100
263222	370	7,5	220	550	100

Releasable detectable ties HUPdetect



- **Detectable with standard metal detectors**
- Material: polyamide
- Thanks to continuous metal components in the material, even small pieces can be identified.
- Eye-catching blue colouring facilitates visual inspection
- Reduction of contamination risks
- Optimisation of quality assurance in food production, for example within the framework of HACCP concepts for hazard analysis
- For temporary fastening and pre-assembly
- Particularly suitable for use in the pharmaceutical and chemical industries as well as in food and animal feed production
- Temperature resistance -40° C to +85° C



Art. No.	Length	W	Height	Width	PU
263230	200	4,8	52	220	100
263232	250	4,8	68	220	100
263234	300	4,8	84	220	100
263240	150	7,6	37	540	100
263242	200	7,6	52	540	100
263244	250	7,6	68	540	100
263246	300	7,6	84	540	100

Detectable tie mounts (saddle type) HUPdetect



- **Detectable with standard metal detectors**
- Material: polyamide
- For quick and reliable fastening of cable bundles and other objects using cable ties
- Thanks to continuous metal components in the material, even small pieces can be identified.
- Eye-catching blue colouring facilitates visual inspection
- Reduction of contamination risks
- Optimisation of quality assurance in food production, for example within the framework of HACCP concepts for hazard analysis
- Temperature resistance -40° C to +85° C



Art. No.	Length	W	Wmax	PU
262168	15	10	4,8	100
262169	23	16	7,6	100

15 years
SERVICE LIFE



Ultra
UV-RESISTANT

HUPultra cable ties

- Material: polyamide
- Colour: black
- Extremely UV-resistant cable ties
- Temperature resistance
-40°C to +85°C
- 15-year service life




Art. No.	↔	W	↑	■	PU
262979	100	2,5	21	80	100
262981	200	2,5	52	80	100
262982	150	3,5	37	180	100
262983	200	3,5	52	180	100
262984	300	3,5	84	180	100
262985	200	4,8	52	220	100
262986	250	4,8	68	220	100
262987	290	4,8	82	220	100
262988	370	4,8	105	220	100
262989	290	7,6	82	540	100
262990	370	7,6	105	540	100
262991	540	7,6	162	540	100
262992	525	9	156	790	50
262993	700	9	205	790	50
262994	770	9	220	790	50
262995	910	9	270	790	50

Detectable tie mounts (self-adhesive) HUPdetect



- **Detectable with standard metal detectors**
- Material: polyamide
- With 3M adhesive pad
- For quick and secure fastening of cable bundles and other objects – wherever screw fastenings are not possible
- Thanks to continuous metal components in the material, even small pieces can be identified.
- Eye-catching blue colouring facilitates visual inspection
- Reduction of contamination risks
- Optimisation of quality assurance in food production, for example in the context of HACCP concepts for hazard analysis
- Temperature resistance -40° C to +85° C




Art. No.	↔	W	Wmax	PU
262166	19	19	3,6	100
262167	28	28	4,8	100

HUPmount cable ties and fir tree mount assemblies



- Material: polyamide
- Colour: black
- For laying, bundling and securing
- White goods
- Automotive industry, air freight and aerospace technology
- Direct attachment of bundled cables to panels, sheet metal and much more
- Temperature resistance: -40°C to +105°C



Art. No.	↔	W	Ø	H1	↑	■	PU
263068	150	3,5	5	6,9	33	180	100
263069	290	4,6	5	6,9	82	220	100
263070	200	4,6	7	11,1	54	220	100
263071	200	4,6	7	12,7	54	220	100
263072	200	4,6	8	12,7	54	200	100
263073	290	4,6	7	11,5	54	220	100

HUPflame cable ties flame retardant



- Material: polyamide
- Colour: ivory
- Special application when increased safety regulations apply with regard to smoke and gas development
- For critical public areas, e.g. rail vehicle construction as well as the construction and armaments industries
- Extremely flame retardant
- Temperature resistance -40°C to +85°C
- **Fire protection properties according to UL 94 V-0**



Art. No.	↔	W	↑	■	PU
263050	100	2,5	21	80	100
263056	150	3,3	38	180	100
263058	199	4,6	54	220	100
263060	290	4,6	81	220	100
263061	370	4,6	106	220	100
263062	370	7,5	101	540	100



INNOVATION ... SAFETY FIRST!



Today's VDE torque wrenches:
A injectionmolded insulated design instead of dip insulation - for maximum material adhesion and durability. Reversible ratchet for right-hand torque allows for safe tightening and loosening.

EXCITING DEVELOPMENT FOR ELECTRICIANS: THE NEW GENERATION OF VDE TORQUE WRENCHES WITH REVERSIBLE CLICK-RACK

Precision meets safety

Anyone who works in the electrical trade knows that safety, precision, and reliability are not optional – they are mandatory! With its new VDE-tested torque wrenches, HAUPA is setting new standards for professional work under voltage. Developed for daily use on construction sites, in switch cabinet construction, or during maintenance work, these tools combine maximum electrical safety with mechanical precision – and with a decisive technological advantage.

Why a VDE-tested torque wrench?

In the electrical trade, correct screw connections are often crucial for the safety and longevity of a system. A contact that is tightened too much can damage the connection, while a contact that is too loose increases the risk of fire. A calibrated, VDE-certified torque wrench ensures that each connection receives exactly the required torque – safely, reproducibly, and demonstrably in accordance with standards.

The advantage of our new series

HAUPA torque wrenches have been specially developed for electrical professionals who do not compromise. The innovative manufacturing process offers several decisive advantages over conventional, dipped VDE designs. They have a righthand fit, allowing screw connections to be tightened and loosened quickly.

MANY GOOD REASONS FOR MORE PRECISION AND SAFETY

Injection-molded insulated design – no dip insulation

Instead of a double dipped layer, the insulation is injected on directly. In practice, this means maximum material adhesion and durability; there is no peeling or tearing of the insulation, even with frequent use. Another advantage: audibly precise triggering – the click of the key is clearly audible, even in noisy environments.

Perfect visibility while working

The injection molding process keeps the mechanism clearly visible, which makes it easier to control your work – you can always see when the desired torque has been reached.

Slimmer sockets – more space in tight installation situations

Thanks to the precise injection molding process, our VDE sockets without compromising on safety. This means they fit even into the tightest terminal spaces and control cabinet areas, where dipped versions are often too bulky.

Maximum safety – 1000 V VDE-tested

Each wrench and each socket is individually tested and approved in accordance with VDE standards and tested. This means you are guaranteed to be on the safe side when working up to 1000 V AC/ 1500 V DC.

Highest precision – calibrated and certified

Each wrench is factory calibrated and enables repeatable torque applications. This ensures that your work remains reliable and compliant with standards – no matter how many screw connections you have to make.

Ergonomic design & professional feel

The handle fits perfectly in your hand, even when wearing gloves. Its low weight and optimal balance enable fatigue-free working throughout the day.



Highlights at a glance:

Quality feature	Your advantage
Injection-insulated design	No detachment, visible triggering, durable
Thin-walled nuts	Can be used in confined spaces
Calibrated torque technology	Precise and reproducible results
1000 V VDE testing	Maximum safety according to IEC 60900
Ergonomic design	Comfortable, robust, practical
Visible and audible release	Maximum work control and safety

Info:

- Mechanical visibility when the selected torque is reached
- Clearly audible click when triggered
- Reversible ratchet for additional loosening of screw connections

TORQUE IS PERFECT.

SAFETY TOO.



Torque wrenches 1000 V 2 - 10 Nm short

TQ 1/4"

- full insulated, non-slip grip
- reversible ratchet with 45 teeth
- **material:** injection-moulded, shock-resistant plastic
- measuring range from 2 - 10 Nm
- measurement accuracy $\pm 6\%$
- drive 1/4"
- with viewing window display
- locking device to prevent unintentional changes to the torque
- protection against accidental loosening of the attachment
- clearly audible or noticeable click when the set torque is reached
- easy to read scale
- with storage case
- total length: 256 mm
- weight: 0,570 kg



08.2026

TOP
DEAL
p. 31



1000 V IEC 60900

Art. No. 220595/10S

Torque wrenches 1000 V 2 - 10 Nm

TQ 1/4"

- full insulated, non-slip grip
- reversible ratchet with 45 teeth
- **material:** injection-moulded, shock-resistant plastic
- measuring range from 2 - 10 Nm
- measurement accuracy $\pm 6\%$
- drive 1/4"
- with viewing window display
- locking device to prevent unintentional changes to the torque
- protection against accidental loosening of the attachment
- clearly audible or noticeable click when the set torque is reached
- easy to read scale
- with storage case
- total length: 300 mm
- weight: 0,670 kg



08.2026

TOP
DEAL
p. 31



1000 V IEC 60900

Art. No. 220595/10

Extensions VDE

1/4"

- fully insulated 1/4" extension
- **material:** injection-moulded, shock-resistant plastic
- adapter: Chrome vanadium steel, chrome-plated
- protection against accidental loosening of the attachment
- total length: 70 mm
- weight: 0,030 kg



08.2026



1000 V IEC 60900

Art. No. 220444

Torque wrenches 1000 V 5 – 25 Nm

Art. No. 220595/25

Reversible ratchet with 45 teeth
material: injection-moulded,
shock-resistant plastic
total length: 300 mm
weight: 0,68 kg

 04.2026

**TOP
DEAL**
p. 31

TQ 1/4"

EASY TO READ

Scale with viewing window

+ REVERSIBLE TORQUE WRENCH

Safe tightening and loosening

+ CLEAR FEEDBACK

Audible and noticeable click



+ NON-SLIP HANDLE

Fully insulated & robust



Adapter VDE 1/4" to 3/8"

1/4"

- fully insulated adapter for use with 3/8" attachments with 1/4" drives
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: Chrome vanadium steel, chrome-plated
- protection against accidental loosening of the attachment
- total length: 62 mm
- weight: 0,036 kg



 08.2026


1000 V IEC 60900

Art. No. 220447

TX sockets VDE

1/4"

- fully insulated insert for Tx screws
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: chrome vanadium steel
- drive 1/4"

 08.2026


1000 V IEC 60900



Art. No.	drive	kg	PU
220596/T6	6 1/4"	55 0,018	1
220596/T7	7 1/4"	56 0,018	1
220596/T8	8 1/4"	57 0,018	1
220596/T9	9 1/4"	56 0,018	1
220596/T10	10 1/4"	57 0,018	1
220596/T15	15 1/4"	57 0,018	1
220596/T20	20 1/4"	57 0,018	1
220596/T25	25 1/4"	57 0,018	1
220596/T27	27 1/4"	57 0,019	1
220596/T30	30 1/4"	56 0,019	1
220596/T40	40 1/4"	57 0,020	1

Hexagon sockets VDE

1/4"

- fully insulated for external TX screws
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: chrome vanadium steel
- drive 1/4"

 08.2026


1000 V IEC 60900



Art. No.	drive	kg	PU
220499/E4	4 1/4"	41 0,013	1
220499/E5	5 1/4"	41 0,013	1
220499/E6	6 1/4"	41 0,013	1
220499/E7	7 1/4"	41 0,015	1
220499/E8	8 1/4"	41 0,015	1
220499/E10	10 1/4"	41 0,016	1

Torque wrenches 1000 V 5 – 25 Nm

TQ 3/8"

- full insulated, non-slip grip
- reversible ratchet with 45 teeth
- **material:** injection-moulded, shock-resistant plastic
- measuring range from 5 – 25 Nm
- measurement accuracy $\pm 4\%$
- drive 3/8"
- with viewing window display
- locking device to prevent unintentional changes to the torque
- protection against accidental loosening of the attachment
- clearly audible or noticeable click when the set torque is reached
- easy to read scale
- with storage case
- total length: 310 mm
- weight: 0,797 kg



TOP
DEAL
p. 31



1000 V IEC 60900

Art. No. 220415/25

Torque wrenches 1000 V 10 – 50 Nm short

TQ 3/8"

- full insulated, non-slip grip
- reversible ratchet with 45 teeth
- **material:** injection-moulded, shock-resistant plastic
- measuring range from 10 – 50 Nm
- measurement accuracy $\pm 4\%$
- drive 3/8"
- with viewing window display
- locking device to prevent unintentional changes to the torque
- protection against accidental loosening of the attachment
- clearly audible or noticeable click when the set torque is reached
- easy to read scale
- with storage case
- total length: 340 mm
- weight: 0,83 kg



TOP
DEAL
p. 31



1000 V IEC 60900

Art. No. 220415/50S

Torque wrenches 1000 V 20 – 100 Nm

TQ 3/8"

- full insulated, non-slip grip
- reversible ratchet with 45 teeth
- **material:** injection-moulded, shock-resistant plastic
- measuring range from 20 – 100 Nm
- measurement accuracy $\pm 4\%$
- drive 3/8"
- with viewing window display
- locking device to prevent unintentional changes to the torque
- protection against accidental loosening of the attachment
- clearly audible or noticeable click when the set torque is reached
- easy to read scale
- with storage case
- total length: 432 mm
- weight: 1,05 kg



TOP
DEAL
p. 31



1000 V IEC 60900

Art. No. 220415/100

Extensions VDE

3/8"

- fully insulated 3/8" extension
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: Chrome vanadium steel, chrome-plated
- protection against accidental loosening of the attachment
- total length: 79 mm
- weight: 0,068 kg



1000 V IEC 60900



Art. No. 220445

Adapter VDE 3/8" to 1/4"

3/8"

- fully insulated adapter for use with 1/4" attachments with 3/8" drives
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: Chrome vanadium steel, chrome-plated
- protection against accidental loosening of the attachment
- total length: 65 mm
- weight: 0,040 kg



1000 V IEC 60900



Art. No. 220448

Adapter VDE 3/8" to 1/2"

3/8"

- fully insulated adapter for use with 1/2" attachments with 3/8" drives
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: Chrome vanadium steel, chrome-plated
- protection against accidental loosening of the attachment
- total length: 69 mm
- weight: 0,077 kg



1000 V IEC 60900



Art. No. 220451

Hexagon socket VDE WS 15

3/8"

- fully insulated insert for hexagonal screws
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: chrome vanadium steel
- wrench size 15 mm
- drive 3/8"
- total length: 30 mm
- weight: 0,040 kg



1000 V IEC 60900



Art. No. 220427

TX sockets VDE



- fully insulated insert for Tx screws
- **material**
insulation: injection-moulded, shock-resistant plastic
- drive 3/8"



1000 V IEC 60900

Art. No.	⚙️	drive	↔️	kg	PU
220359/T10	10	3/8"	65	0,038	1
220359/T15	15	3/8"	65	0,038	1
220359/T20	20	3/8"	65	0,039	1
220359/T25	25	3/8"	65	0,038	1
220359/T27	27	3/8"	65	0,039	1
220359/T30	30	3/8"	65	0,039	1
220359/T40	40	3/8"	65	0,039	1
220359/T45	45	3/8"	65	0,041	1
220359/T50	50	3/8"	65	0,042	1
220359/T55	55	3/8"	65	0,050	1



Spline sockets VDE



- fully insulated insert for XZN screws
- **material**
insulation: injection-moulded, shock-resistant plastic
- drive 3/8"



1000 V IEC 60900

Art. No.	⚙️	drive	↔️	kg	PU
220442/M5	5	3/8"	64	0,039	1
220442/M6	6	3/8"	64	0,039	1
220442/M8	8	3/8"	64	0,040	1
220442/M10	10	3/8"	64	0,049	1



TX sockets long VDE 120 mm



- fully insulated insert for Tx screws
- **material**
insulation: injection-moulded, shock-resistant plastic
- drive 3/8"
- total length: 120 mm



1000 V IEC 60900

Art. No.	⚙️	drive	↔️	kg	PU
220441/T10	10	3/8"	120	0,055	1
220441/T15	15	3/8"	120	0,055	1
220441/T20	20	3/8"	120	0,055	1
220441/T25	25	3/8"	120	0,055	1
220441/T27	27	3/8"	120	0,056	1
220441/T30	30	3/8"	120	0,056	1
220441/T40	40	3/8"	120	0,057	1
220441/T45	45	3/8"	120	0,068	1
220441/T50	50	3/8"	120	0,069	1
220441/T55	55	3/8"	120	0,090	1



TX sockets external VDE



- fully insulated insert for external TX screws
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: chrome vanadium steel
- drive 3/8"



1000 V IEC 60900

Art. No.	⚙️	drive	↔️	kg	PU
220358/E6	6	3/8"	44	0,025	1
220358/E7	7	3/8"	44	0,025	1
220358/E8	8	3/8"	44	0,027	1
220358/E10	10	3/8"	44	0,028	1
220358/E11	11	3/8"	44	0,028	1
220358/E12	12	3/8"	44	0,029	1
220358/E14	14	3/8"	44	0,035	1
220358/E16	16	3/8"	44	0,037	1
220358/E18	18	3/8"	44	0,046	1



SOCKET TOOLS

1000 V | DRIVE 3/8"



Further 1000 V plug-in tools
with 3/8" drive in our
illustrated price list, p. 82

Torque wrenches 1000 V 10 – 50 Nm

TQ 1/2"

- full insulated, non-slip grip
- reversible ratchet with 45 teeth
- **material:** injection-moulded, shock-resistant plastic
- tested up to 1000 V
- measuring range from 10 – 50 Nm
- measurement accuracy $\pm 4\%$
- drive 1/2"
- with viewing window display
- locking device to prevent unintentional changes to the torque
- protection against accidental loosening of the attachment
- clearly audible or noticeable click when the set torque is reached
- easy to read scale
- with storage case
- total length: 398 mm
- weight: 1,08 kg



**TOP
DEAL**
p. 31



1000 V IEC 60900

Art. No. 220451/50

Torque wrenches 1000 V 20 – 100 Nm

TQ 1/2"

- full insulated, non-slip grip
- reversible ratchet with 45 teeth
- **material:** injection-moulded, shock-resistant plastic
- tested up to 1000 V
- measuring range from 20 – 100 Nm
- measurement accuracy $\pm 4\%$
- drive 1/2"
- with viewing window display
- locking device to prevent unintentional changes to the torque
- protection against accidental loosening of the attachment
- clearly audible or noticeable click when the set torque is reached
- easy to read scale
- with storage case
- total length: 442 mm
- weight: 1,18 kg



**TOP
DEAL**
p. 31



1000 V IEC 60900

Art. No. 220451/100

Torque wrenches 1000 V 40 – 200 Nm

TQ 1/2"

- full insulated, non-slip grip
- reversible ratchet with 45 teeth
- **material:** injection-moulded, shock-resistant plastic
- tested up to 1000 V
- measuring range from 40 – 200 Nm
- measurement accuracy $\pm 4\%$
- drive 1/2"
- with viewing window display
- locking device to prevent unintentional changes to the torque
- protection against accidental loosening of the attachment
- clearly audible or noticeable click when the set torque is reached
- easy to read scale
- with storage case
- total length: 530 mm
- weight: 1,36 kg



**TOP
DEAL**
p. 31



1000 V IEC 60900

Art. No. 220451/200

Extensions VDE

1/2"

- fully insulated 1/2" extension
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: Chrome vanadium steel, chrome-plated
- protection against accidental loosening of the attachment
- total length: 86 mm
- weight: 0,115 kg



1000 V IEC 60900



Art. No. 220446

Adapter VDE 1/2" to 3/8"

1/2"

- fully insulated adapter for use with 1/2" attachments with 3/8" drives
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: Chrome vanadium steel, chrome-plated
- protection against accidental loosening of the attachment
- total length: 72 mm
- weight: 0,072 kg



1000 V IEC 60900



Art. No. 220453

Hexagon socket VDE WS 15

1/2"

- fully insulated insert for hexagonal screws
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: chrome vanadium steel
- wrench size 15 mm
- drive 1/2"
- total length: 54 mm
- weight: 0,062 kg



1000 V IEC 60900



Art. No. 220467

TX sockets long VDE 118 mm

1/2"

- fully insulated insert for Tx screws
- **material**
insulation: injection-moulded, shock-resistant plastic
- drive 1/2"



1000 V IEC 60900

Art. No.	⚙️	drive	↔️	kg	PU
220495/T30	30	1/2"	118	0,094	1
220495/T40	40	1/2"	118	0,095	1
220495/T45	45	1/2"	118	0,095	1
220495/T50	50	1/2"	118	0,096	1
220495/T55	55	1/2"	118	0,109	1



Spline Sockets VDE



- fully insulated insert for XZN screws
- **material**
insulation: injection-moulded, shock-resistant plastic
- drive 1/2"



Art. No.	⊗	drive	⇄	kg	PU
220498/M5	5	1/2"	77	0,075	1
220498/M6	6	1/2"	77	0,076	1
220498/M8	8	1/2"	77	0,077	1
220498/M10	10	1/2"	77	0,079	1



Spline sockets long VDE 118 mm



- fully insulated insert for XZN screws
- **material**
insulation: injection-moulded, shock-resistant plastic
- drive 1/2"
- total length 118 mm



Art. No.	⊗	drive	⇄	kg	PU
220498/LM8	8	1/2"	118	0,095	1
220498/LM10	10	1/2"	118	0,108	1



Hexagon sockets long VDE 80 mm



- fully insulated insert for hexagonal screws
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: chrome vanadium steel
- wrench size 15 mm
- drive 1/2"



Art. No.	⊗	drive	⇄	kg	PU
220458/80	10	1/2"	80	0,083	1
220460/80	11	1/2"	80	0,092	1
220462/80	12	1/2"	80	0,104	1
220464/80	13	1/2"	80	0,111	1
220466/80	14	1/2"	80	0,121	1
220467/80	15	1/2"	80	0,128	1
220468/80	17	1/2"	80	0,145	1
220470/80	19	1/2"	80	0,155	1



TX sockets external VDE



- fully insulated insert for external TX screws
- **material**
insulation: injection-moulded, shock-resistant plastic
adapter: chrome vanadium steel
- drive 1/2"



Art. No.	⊗	drive	⇄	kg	PU
220497/E10	10	1/2"	55	0,055	1
220497/E11	11	1/2"	55	0,054	1
220497/E12	12	1/2"	55	0,054	1
220497/E14	14	1/2"	55	0,056	1
220497/E16	16	1/2"	55	0,061	1
220497/E18	18	1/2"	55	0,060	1
220497/E20	20	1/2"	55	0,071	1
220497/E22	22	1/2"	55	0,082	1
220497/E24	24	1/2"	55	0,088	1



SOCKET TOOLS

1000 V | DRIVE 1/2"



Further 1000 V plug-in tools
with 1/2" drive in our
illustrated price list, p. 83

FLUORESCENT- SCENT ALWAYS A GUIDING

HUPlightStripeSafety

**TOP
DEAL**
p. 31



08.2026

Safety first! - Visible. Secure. Always. Our new HUPlightStripeSafety light strip is powered by **low voltage (48 V DC)** and therefore complies with **protection class 3**, meaning there is no risk of electric shock if the strip is accidentally pinched or cut. With IP65, the light strip is suitable for use in damp working environments. HUPlightStripeSafety is **flicker-free**, so there is no annoying flickering effect that can interfere with work and, in the worst case, lead to misjudgements on rotating equipment. As an additional safety feature, the strip continues to glow for approx. 15 - 20 minutes after a power failure due to a **fluorescent effect**. HUPlightStripeSafety can be extended to a maximum length of 50 m. The powerful LEDs on both sides result in a beam angle of 240° (120° per side) and guarantee optimum glare-free illumination.

Technical data

- Double-sided, flexible LED light strip
- LED 275 W
- 2 x 180 LEDs/m
- Length: 25 m
- Width x height: 16 mm x 8 mm
- PVC sheathing, phosphorescent (fluorescent green)
- Power: 275 W at 48 V DC
- Lumens per metre: 1100 lm/m (27500 lm)
- Light colour neutral white: 4000 K
- Colour rendering index CRI > 90
- Operating temperature: -25 °C to 55 °C
- IP65
- Equipped with 400 W constant voltage power supply (SELV):
 - Input: AC 200-277 V; 50/60 Hz; max. 2,3 A
 - Output: DC 48 V; 0-8,33 A; 400 W max.
- Protection class 3
- Power factor: 0,95
- Cable with power supply unit: 2,5 m
- Maximum connection of 2 x 25 m HUPlightStripeSafety LED light strip
- Weight: 8,30 kg

Art. No. 130392





OFF




ON



AFTER-GLOW

ING GLOW.

The tape continues to glow for approx. 15 – 20 minutes after a power failure due to a fluorescent effect.

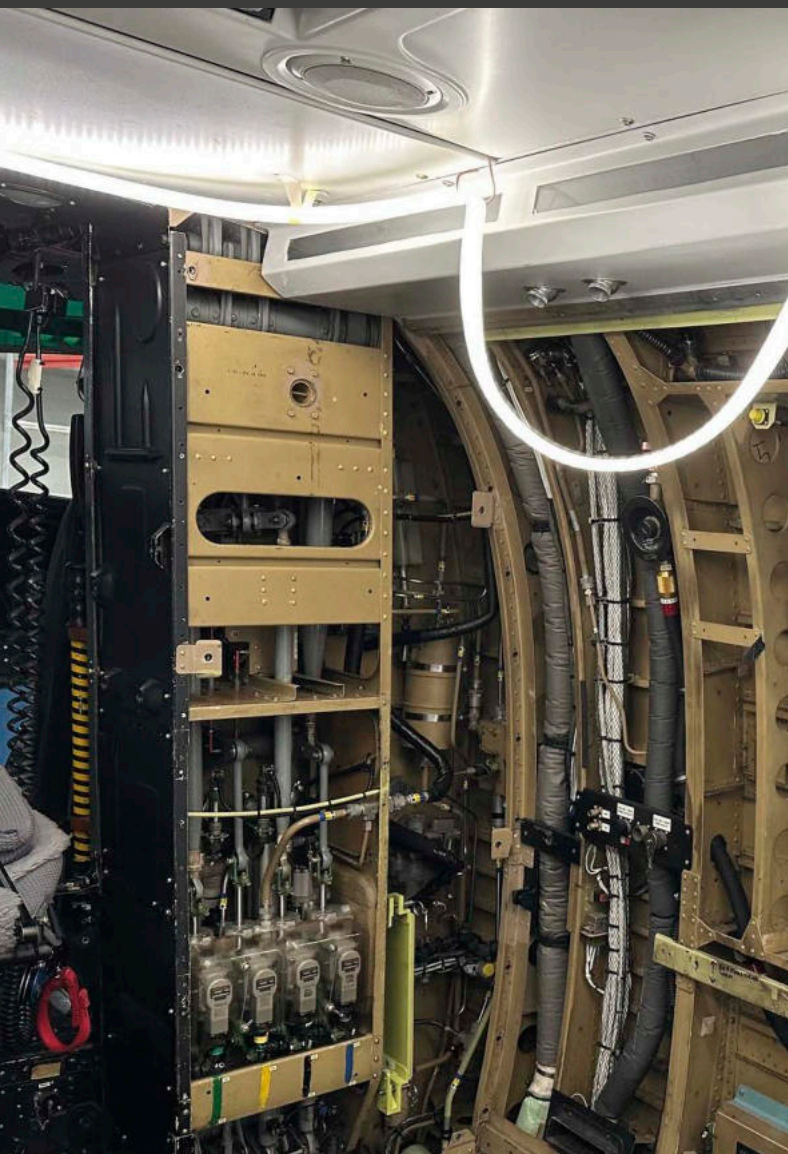

FLEXIBILITY

USE WITH ADAPTER



Adapters for MILWAUKEE,
BOSCH, DEWALT in our
hydraulics brochure, p. 5



HUlightStripeMobile

TOP
DEAL
p. 31




The HUlightStripe Mobile is a flexible, mobile LED light strip that has been specially developed for use with standard 18 V Makita batteries. Ideal for construction sites, service work, events or temporary lighting solutions – completely without cables or a power connection.

Highlights

- Compatible with standard 18 V Makita batteries – ready for immediate use without an additional power supply.
- 3-stage dimmable: 25%, 50% or 100% brightness – flexible for any application.
- Long operating time: up to 8 hours of runtime per charge (with 6 Ah battery at 25% power).
- Cordless operation: no cable chaos, quick setup and dismantling, maximum freedom of movement.
- Compact & easy to store: easy to transport and space-saving packaging.
- Battery NOT included.

Technical data

- Light strip length: 10 m
- LED 50 W
- 176 LEDs/m
- Brightness: 900 lm/m (total 9000 lm)
- Light colour: Neutral white, 4000 K
- Colour rendering: CRI > 90
- Material: PVC sheathing, phosphorescent (fluorescent green)
- Operating temperature: -25 °C to +55 °C
- Protection class: IP65 (dustproof & water jet-proof)
- Weight: 2.64 kg

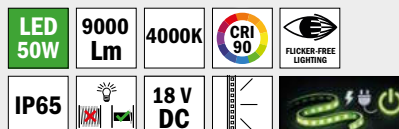

Art. No. 130394

EMERGENCY LIGHTING

BLACKOUT?

NOT WITH US.

HUPlightStripeEmergency

**TOP
DEAL**
p. 31


08.2026

Emergency power supply for our HUPlightStripe 230 V light strips (130364 and 130366) as an ideal addition to permanently installed and temporary installations. When connected to the mains, the HUPlightStripe can be switched on and off with an on/off button at full light output. In the event of a power failure, the emergency light activates in less than a second and supplies the HUPlightStripe with a reduced voltage of 175 V DC. This allows for up to 2 x 60 minutes of emergency lighting. Depending on the length of the HUPlightStripe light strip, the reduced voltage decreases the light output.

- Emergency power supply: 50 W
- Lamp power: max. 1500 W
- Input voltage: 100-277 V, 50/60 Hz
- Output voltage: DC 50-180 V
- Battery: 22.2 V, 4000 mAh, lithium-ion battery
- Charging time
- Weight: 2.35 kg




Art. No. 130368



Complete work light range
from HAUPA with the right
work-place lighting

THE SAFETY BONUS MORE ROLL – MORE PULL

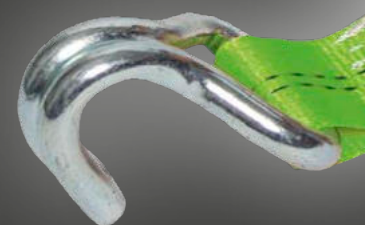

Tension strap with clamp lock 4 m x 25 mm

TOP
DEAL
p. 31



04.2026

We keep your load secure and you safe.

Lashing straps with a 25 mm webbing width and clamp lock are particularly suitable for securing loads in cars, on trailers or for securing loading units (strapping).

Technical data

- Manufactured in accordance with EN 12195-2
- Lashing force LC in strapping 250 daN
- Webbing width 25 mm
- Length 4 m
- Colour green
- Material PES
- Operating temperature range from -40 °C to 100 °C



Art. No. 393162

Tension strap with clamp lock 0,3 m x 25 mm for HUPlightStripe

TOP
DEAL
p. 31



04.2026

Lashing strap, in a special short version measuring **only 30 cm in length** for our HUPlightStripe light strip range (items 130364, 130366, 130392 and 130394).

Simple and gentle fastening, e.g. to pipes and similar objects, of our HUPlightStripe light strips. Sustainable, flexible and reusable.

Technical data

- Strap width 25 mm
- Length 30 cm
- Material PES

Sold in packs of 5



Art. No. 393164

**OPTIMISED
MECHANICS**
Theft-proof

HIGHER LASHING CAPACITY
LC 1.000 daN direct | superior
for safe transport of the load



VERSATILE
Double-ended pointed hooks,
5 m long



AUTOMATIC BRAKING FUNCTION
practical, safe, injury-free

Automatic tensioning strap PLUS 5 m x 35 mm

**TOP
DEAL**
p. 31


08.2026

The Automatic Tensioning Strap PLUS stands out from other automatic tensioning straps on the market thanks to its many practical features. The strap feed with automatic brake function is particularly user-friendly. This prevents the hook from kicking back, eliminating the risk of hand injuries when lashing down loads.

Instead of the usual maximum length of 3 m, the Automatic Tensioning Strap PLUS is **5 m long** and therefore suitable for significantly more applications. It really comes into its own in small vans or on trailers. This also includes a significantly higher lashing capacity than comparable products on the market. With a **lashing capacity of LC 1,000 daN (in direct tension)**, the Automatic Tensioning Strap PLUS is significantly superior to other automatic tensioning straps, which currently have a maximum LC of 750 daN.

The new optimised mechanism allows a padlock to be attached to the ratchet lever. This protects the lashing strap securely against theft. It also ensures that the load securing has not been altered during a break. Thanks to the automatic function, there is no longer any need to thread the strap into the ratchet. This makes the strap very easy to use.

Another advantage is that, as the Automatic Tensioning Strap PLUS no longer tensions the entire strap roll, but only part of it, the strap loosens significantly less during the journey. This is a major advantage over other automatic tensioning straps on the market.

Technical data

- Band width 35 mm
- Length 5 m
- Colour green
- Material PES
- Operating temperature range from -40°C to 100°C
- Spiked hooks at both ends
- Ratchet (steel) with separate strap storage

Easy to use in 6 steps

- Open the ratchet completely and turn the winding shaft into position using the side adjustment aid
- Attach the strap to the load
- Operate the ratchet so that there are at least 2 - 3 layers of strap on the winding shaft and the strap is taut
- Fold the ratchet backwards during transport (resting on the roller)
- To release, open the ratchet completely again
- Roll up the strap, braking the strap by hand if necessary when the automatic brake is activated

Art. No. 393160

CONTRACTOR-GRADE TOOLS SELF-ADJUSTING

720° HD handheld inspection camera BRICamS Plus

TOP
DEAL
p. 30


08.2026

An endoscope with a camera head that can be moved in all directions using a joystick was previously prohibitively expensive.

The new BRICamS Plus endoscope offers the performance that is urgently needed in the trade at a fair price. Now it is possible to precisely locate leaks, faults and blockages and visualise conditions in any type of cavity. Equipped with a 6.5 mm camera head containing 2 HD lenses (1x 90° + 1x 180°) and a 1 m long push cable, only small openings are needed to achieve success with the inspection system.

Images and videos can be recorded on a micro SD card, and the working environment can be illuminated with two LEDs on the back of the control unit. Two zoom levels and the simultaneous display of images from the 90° and 180° lenses offer many solutions for achieving the desired result.

Safely stored in a durable soft box.


- HD inspection camera with 5-inch LCD HD screen for high-resolution real-time display
- Camera head 6,5 mm
- Screen HD resolution 1920 x 1080
- Single photo and video recording included on micro SD card for later verification
- Max. battery life 6 hours
- Waterproof camera head IP67

Content:

- Handheld screen device
- SD card
- 1 metre camera cable
- Operating instructions
- Soft box
- USB C charging cable



Art. No. 3785

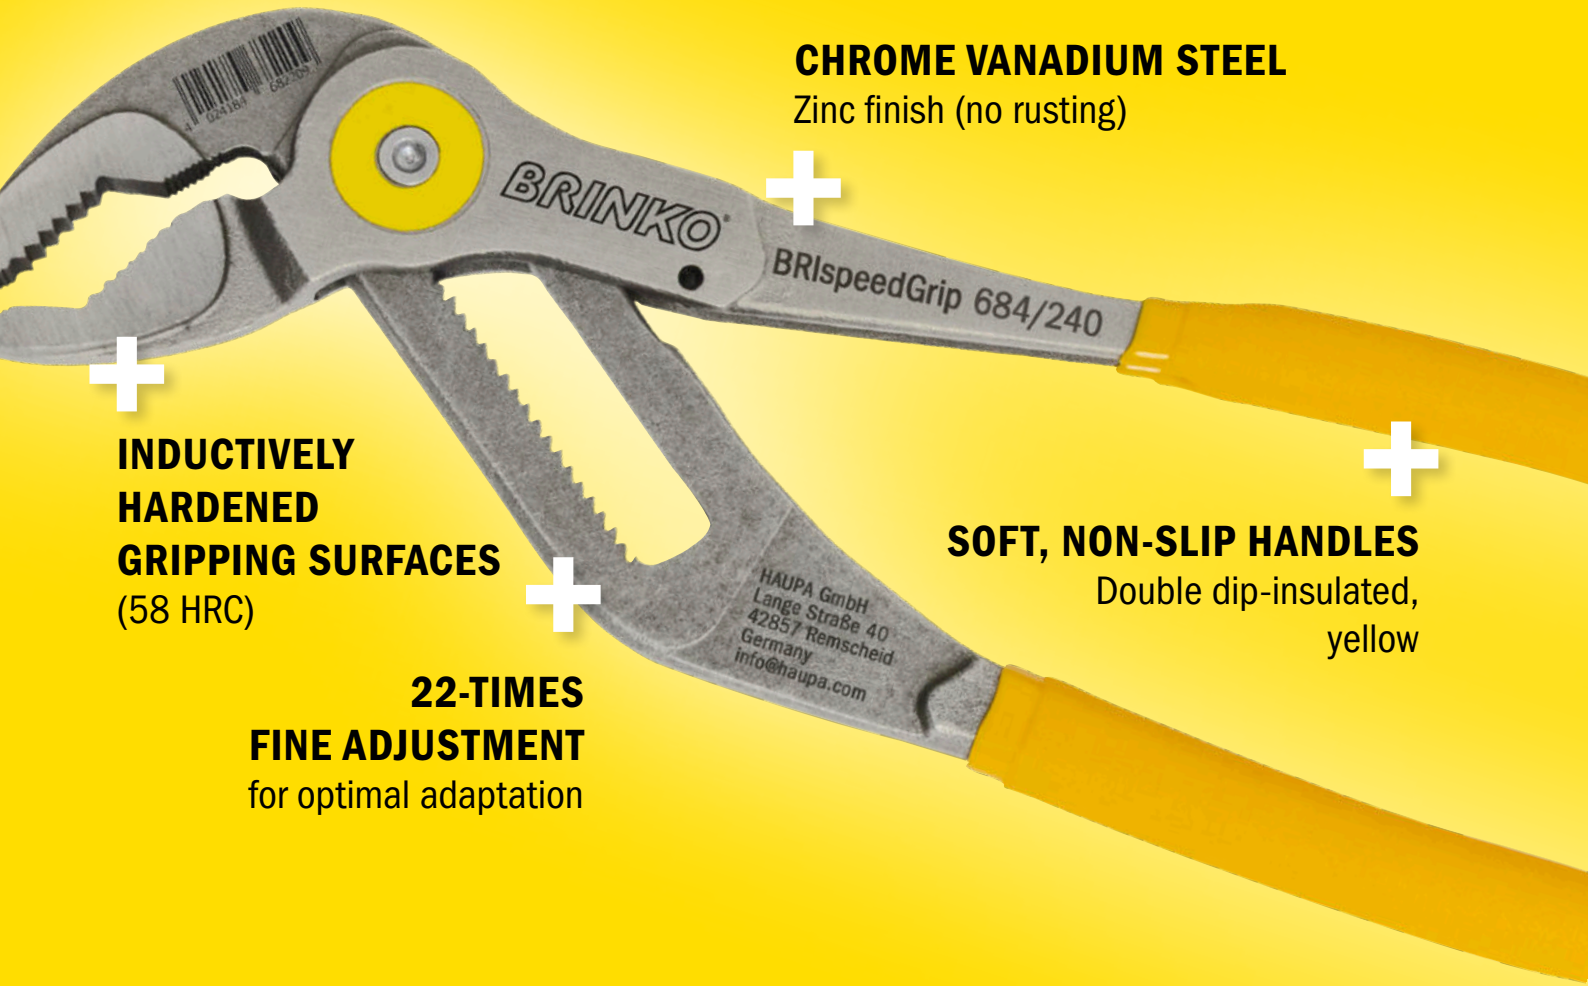

CHROME VANADIUM STEEL

Zinc finish (no rusting)

**INDUCTIVELY
HARDENED
GRIPPING SURFACES**
(58 HRC)

**22-TIMES
FINE ADJUSTMENT**
for optimal adaptation

SOFT, NON-SLIP HANDLES
Double dip-insulated,
yellow

**FAST,
INTUITIVE,
PRECISE**

Self-adjusting water pump pliers BRIspeedGrip

**TOP
DEAL**
p. 30

The BRINKO BRIspeedGrip is a special water pump pliers with automatic size adjustment. It enables quick, intuitive and precise adjustment to the respective workpiece, whether pipe, union nut or screw. This makes work comfortable, safe and without manual readjustment.

Like all BRINKO water pump pliers, the BRIspeedGrip is made of chrome vanadium steel and hard chrome-plated. Thanks to inductively hardened gripping teeth and double dip-insulated, non-slip soft handles, it impresses with its durability, ergonomics and maximum precision. A tool that leaves nothing to be desired.

- Pipe grip size (Ø): 2" | 50 mm
- Hexagon grip size (SW): 46 mm
- Total length: 240 mm
- Self-clamping on pipes and nuts
- With finger protection
- Polished jaws

Art. No. 684/240

SHAPE-STABLE CUTTING PERFOR- MANCE

**SHAPE-RETAINING
CUTTING STABLE
CUTTING**
precise, clean,
near-zero deformation



**BRICUTV composite pipe cutter,
16 - 26 mm**

**TOP
DEAL**
p. 30


08.2026

The BRICUTV composite pipe cutter is specially designed for near-zero deformation cutting of composite pipes. The holding jaws automatically adjust to pipe diameters from 16 mm to 26 mm.

The coated, sharp-ground blade further enhances this effect. Its low weight (only 191 g) thanks to special die-cast aluminium and its small pack size make these pipe cutter an indispensable tool.

- Suitable for pipes (Ø): 16 - 26 mm
- Total length: 220 mm
- Lever transmission
- Low effort required
- Replaceable blade
- Automatic size adjustment

Art. No. 635/26

FOR THE BEST CUT

‘Shape stable’ means that the composite pipe is much less deformed during cutting, making it easier to insert fittings and reducing damage to O-rings. This saves a lot of time and produces a higher-quality result.

BRINKO BRICUTV – shape retaining cutting of composite pipes.

**COATED,
SHARPLY GROUNDED**
cleanly separated

**LOCKABLE FOR
TRANSPORT**
small pack size

OPENING MECHANISM
Spring-assisted

LOW WEIGHT
die-cast aluminium

LOW EFFORT
ergonomic, efficient



**Chemical protective gloves, size 10, long cuffs
for maintenance work on heat pumps**

**TOP
DEAL
p. 30**

- Protects against skin contact with hazardous substances
- Long cuffs to protect the forearms
- Coated palms
- For gripping and operating even small components
- Nylon jersey lining
- Liquid-tight
- Glove size 10
- Colour: turquoise|black
















Art. No. 3457-1/10

TOP DEAL





NEW PRODUCTS TRADE FAIR

CABLE CONNECTION TECHNOLOGY

Articles	Art. No.	EUR net (RRP)	Page
	212808	125,⁰⁰	3
	216801-1-HD	1.560,⁰⁰	5
	216669-1-HD	1.850,⁰⁰	5
	216437-1	3.585,⁰⁰	6
	216438-1	4.150,⁰⁰	7
	216878-SET	906,⁰⁰	9
	216036-SET	645,⁵⁰	8
	216008-SET	691,⁰⁰	8
	216008/V-SET	695,⁰⁰	8

Articles	Art. No.	EUR net (RRP)	Page
	216160-SET	1.176,⁰⁰	9
	216042/AL-SET	590,⁰⁰	9
	216926-SET	692,⁰⁰	9
	216088-SET	473,⁰⁰	9

PLUMBING CRAFT










Articles	Art. No.	EUR net (RRP)	Page
	3785	259,⁰⁰	26
	684/240	29,⁰⁰	27
	635/26	35,⁰⁰	28
	3457-1/10	9,⁰⁰	29

#LB26







SPOTLIGHT @TRADE FAIR

PROMOTION

WORKING UNDER TENSION (VDE)

Articles	Art. No.	EUR net (RRP)	Page
	220595/10	285,⁰⁰	14
	220595/10S	275,⁰⁰	14
	220595/25	285,⁰⁰	15
	220415/25	299,⁰⁰	16
	220415/100	359,⁰⁰	16
	220415/50S	305,⁰⁰	16
	220451/50	325,⁰⁰	18
	220451/100	359,⁰⁰	18
	220451/200	489,⁰⁰	18

BASIC TOOLS

Articles	Art. No.	EUR net (RRP)	Page
	130392	369,⁰⁰	20
	130394	99,⁰⁰	22
	130368	210,⁰⁰	23
	393162	5,⁴⁰	24
	393164	14,⁰⁰	24
	393160	25,⁰⁰	25

The prices are non-binding recommended promotional prices, plus statutory VAT. Valid until 31/01/2027.
Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

haupa®

EXPERTISE TO THE POWER OF THREE!

Your experienced specialist for industry and craft



**CABLE CONNECTION
TECHNOLOGY AND
SYSTEM TOOLS**



**LIVE WORKING
EQUIPMENT**



**EVERYTHING FOR THE
PLUMBING CRAFT**

HAUPA W4263NH - 500/EN

Your wholesaler:

(Company stamp)



HAUPA GmbH

Lange Straße 40 | 42857 Remscheid | Germany

Phone: +49 2191 8418-0 | www.haupa.com | E-mail: info@haupa.com

The prices are non-binding recommended promotional prices, plus statutory VAT. Valid until 31/01/2027. Sales are conducted exclusively through specialized wholesalers. Technical changes and printing errors reserved.

